


GOLF-RGL28F|48F|155F|195F|265F|325F





Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

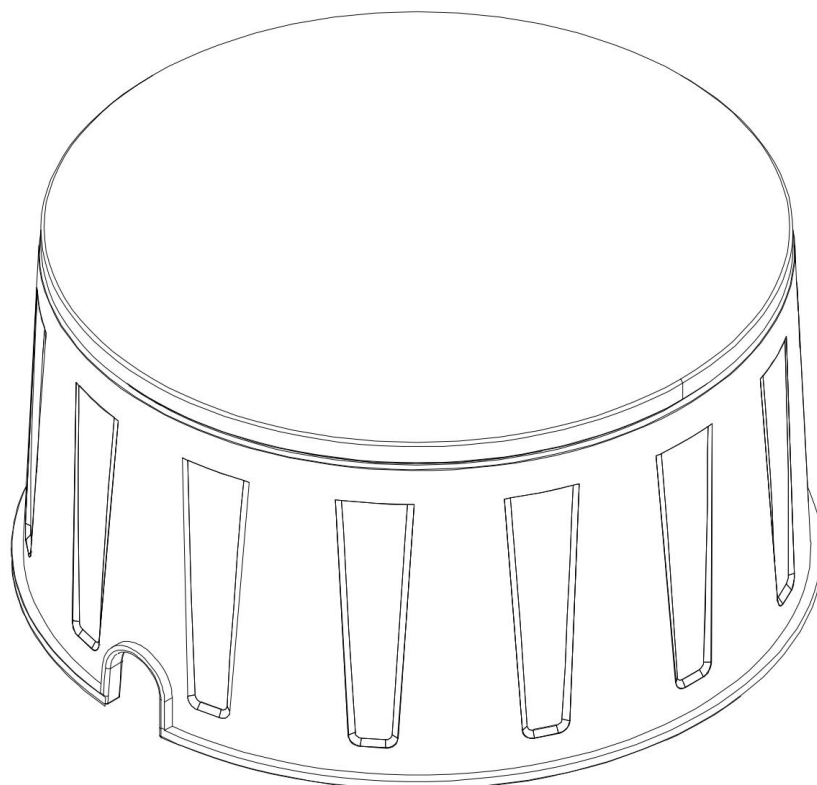

Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!




RGL28F




RGL48F




RGL155F



RGL195F




RGL265F




RGL325F

STEP 1: Luminaire Installation


Use embedded parts that are appropriate for use with your mounting surface.




RGL28F




RGL48F

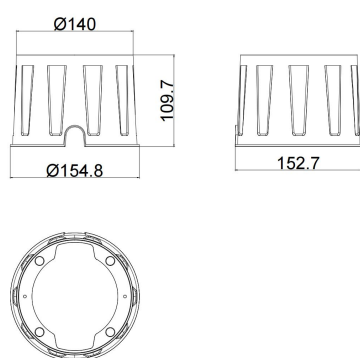


RGL155F

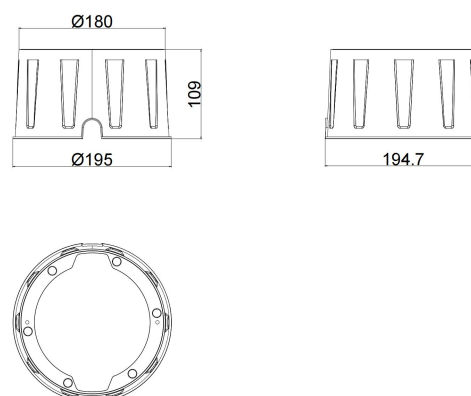

RGL195F

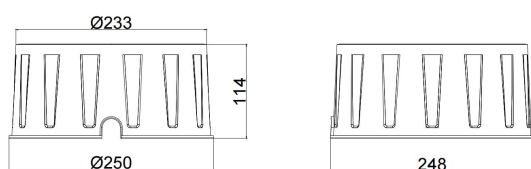


RGL265F

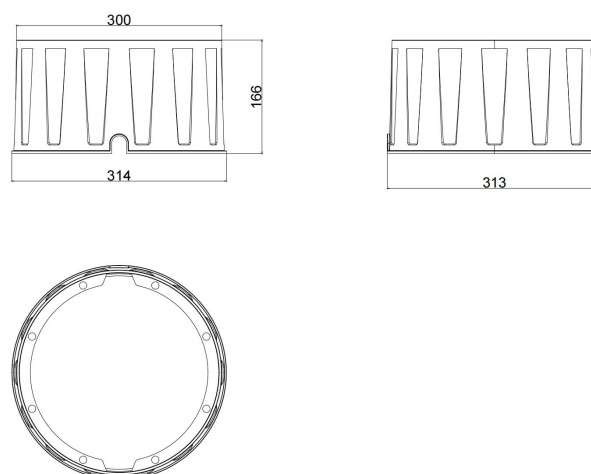

RGL325F


①

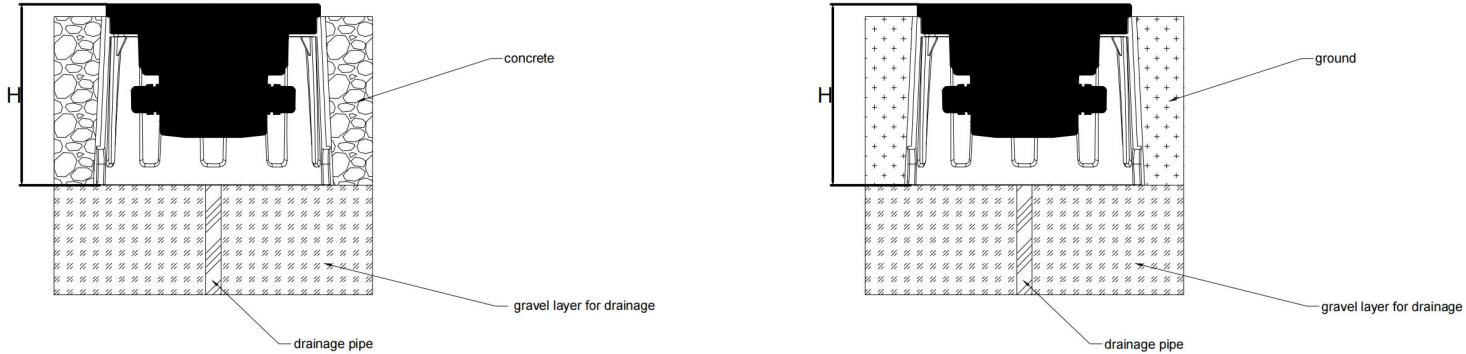


Dig pits according to the size of the embedded parts. Make sure the embedded parts are flush with the concrete or ground at the appropriate height as indicated below, with a layer of drainage gravel and drainage pipes laid underneath.

version	(H)
RGL28F	106.2
RGL48F	111.2
RGL115F	119
RGL195F	119
RGL265F	124
RGL325F	180.8


②

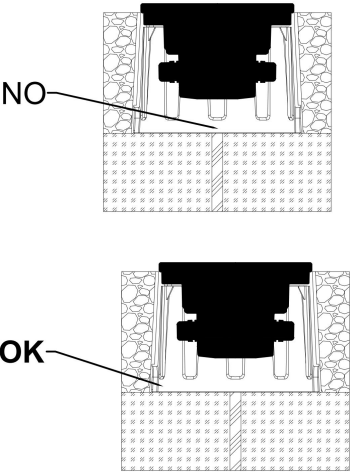

③

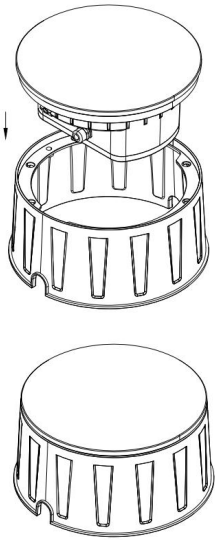

④

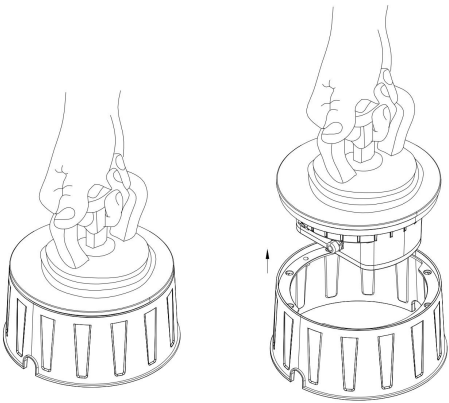






Install the embedded parts at the predetermined lamp installation position. Arrange the cables on the sides of the luminaires as indicated.









Place the light fixture into the embedded parts.

If maintenance and replacement are needed, the lamp can be removed using the matching suction cup.

STEP 2: Wiring Cable Installation

⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

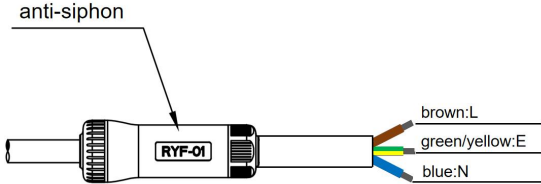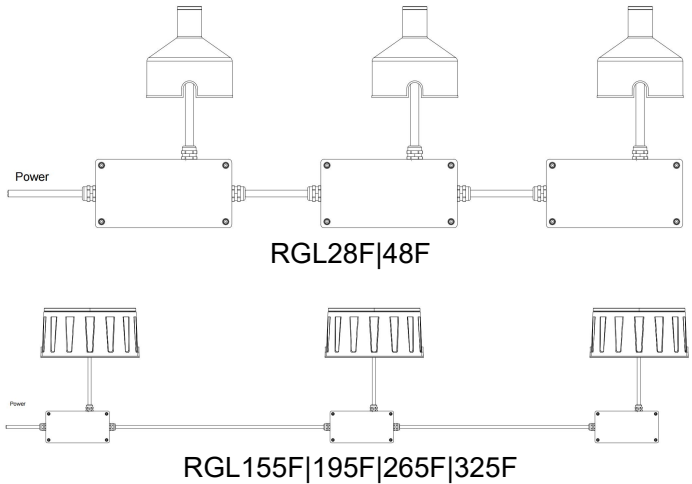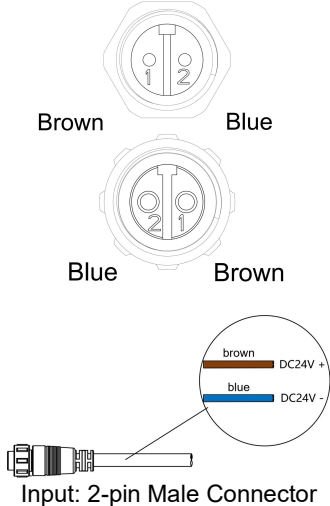ON/OFF AC	
 RGL155F 195F 265F 325F	 anti-siphon brown:L green/yellow:E blue:N Power In: 3-core wire lead with anti-siphon
ON/OFF DC	
 RGL28F 48F RGL155F 195F 265F 325F	Cable connector or Wire lead with anti-siphon  Brown Blue Blue Brown brown DC24V + blue DC24V - Input: 2-pin Male Connector  anti-siphon brown DC24V + blue DC24V - Input: 2-core wire lead with anti-siphon

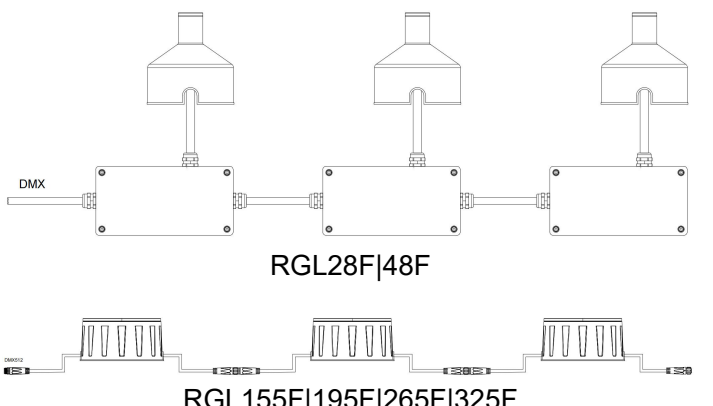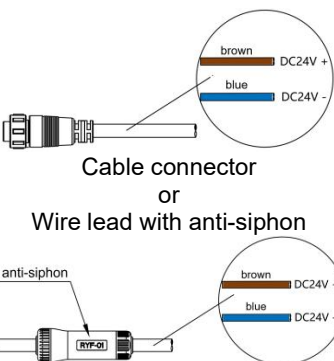DMX Control DC  RGL28F 48F RGL155F 195F 265F 325F	2 cable connector wire (In & Out 5-pin connector) Green White Black Blue Brown  Power/ Data-In: 5-pin Male Connector Blue White Brown Green Black  Power/ Data-Out: 5-pin Female Connector 2 cable connector wire (In & Out 4-pin connector) & 1 wire lead  Cable connector or Wire lead with anti-siphon Black Green White Blue  Data-In: 4-pin Male Connector White Blue Black Green  Data-Out: 4-pin Female Connector
---	---

WARNING & NOTICE

- ⚠ Arrange the cables on the sides of the luminaires as indicated below.
- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Before powering up the system, please ensure that the polarity is connected correctly. Incorrect connection may cause product malfunction.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.

