


GOLF-RGL28|48|65|155|195|265|325|195T|265T





Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

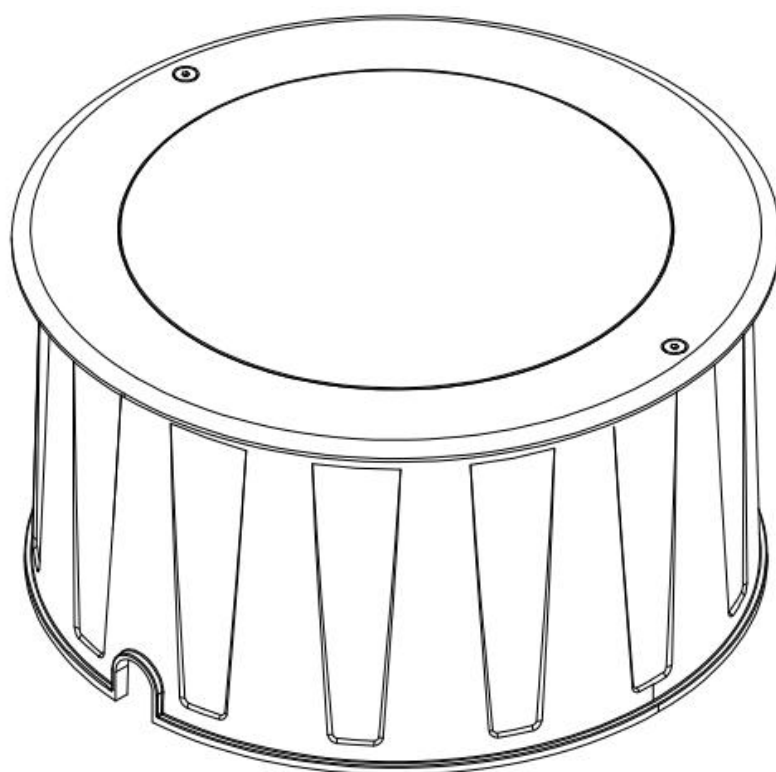

Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!



RGL28



RGL48




RGL65




RGL155



RGL195




RGL265



RGL325




RGL195T





RGL265T

STEP 1: Luminaire Installation



Use embedded parts that are appropriate for use with your mounting surface





RGL28




RGL48




RGL65





RGL155





RGL195

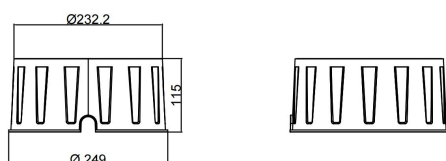



RGL265

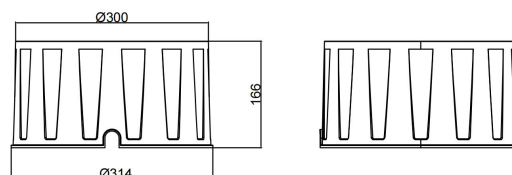


RGL325

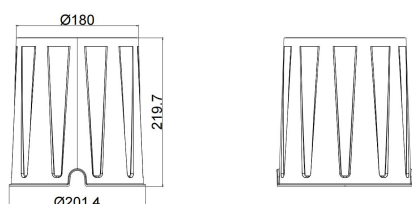


RGL195T

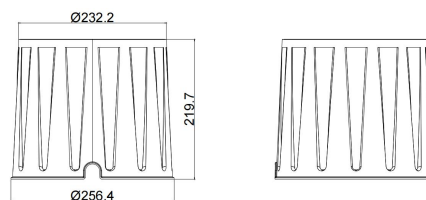

RGL265T




①

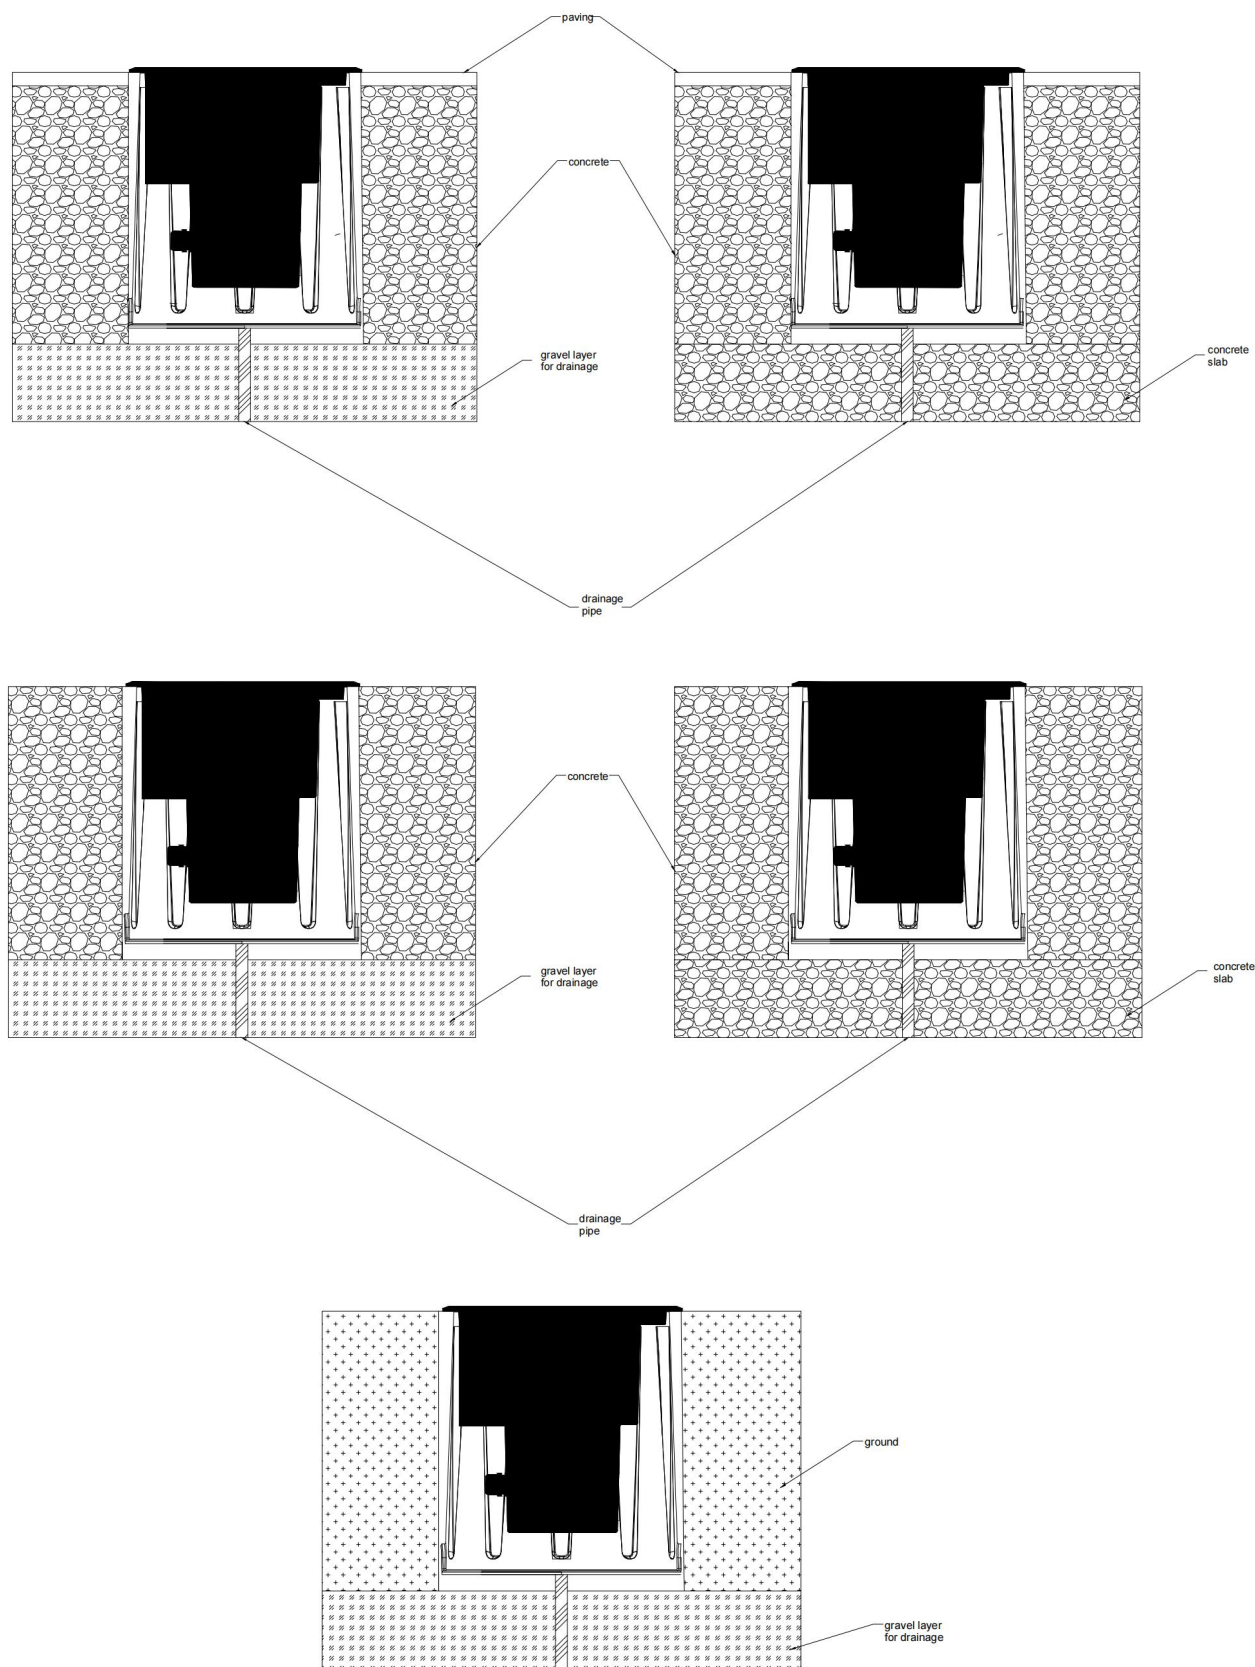


Dig pits according to the size of the embedded parts. All installation positions must comply with those illustrated.

②

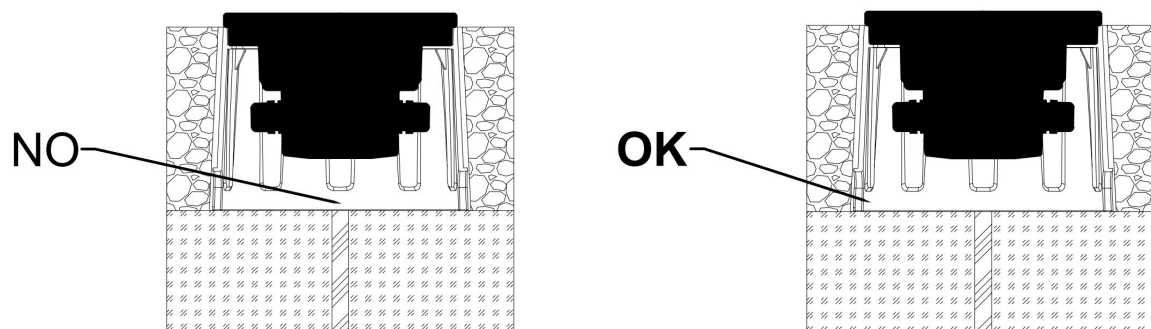

Install the embedded parts at the predetermined lamp installation position. Arrange the cables on the sides of the luminaires as indicated.








③

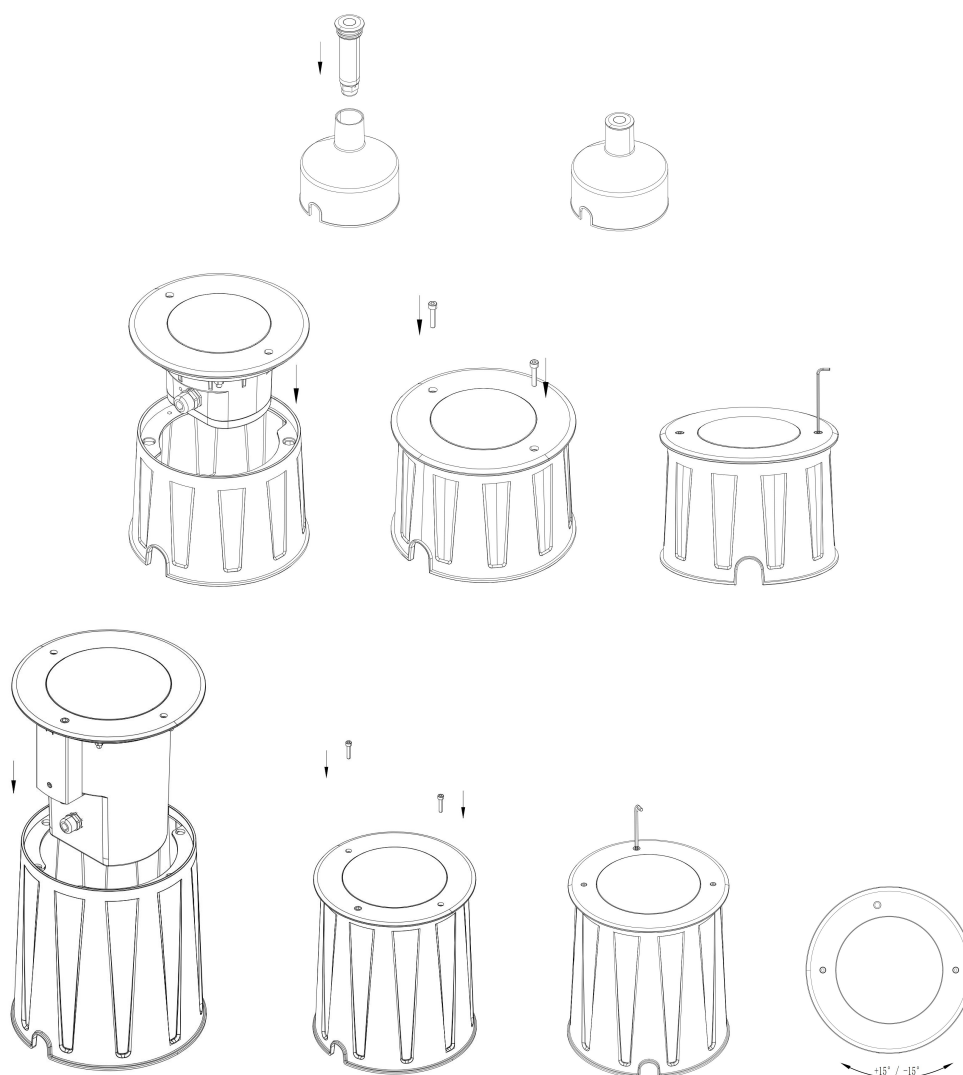



Place the light fixture into the embedded parts and fasten with screws (if any). For FGL195T and RGL265T, adjust the beam angle in range of $+15^{\circ} / -15^{\circ}$.

STEP 2: Wiring Cable Installation




⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

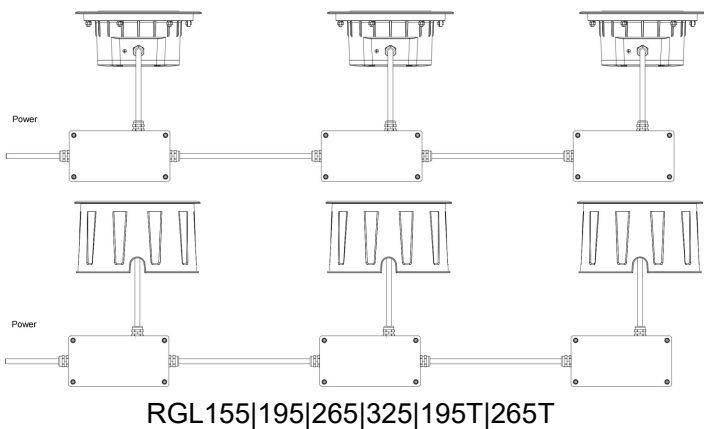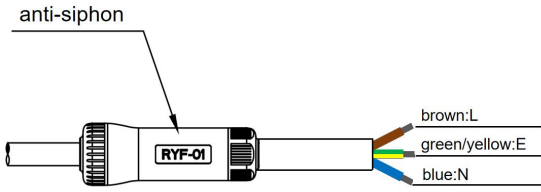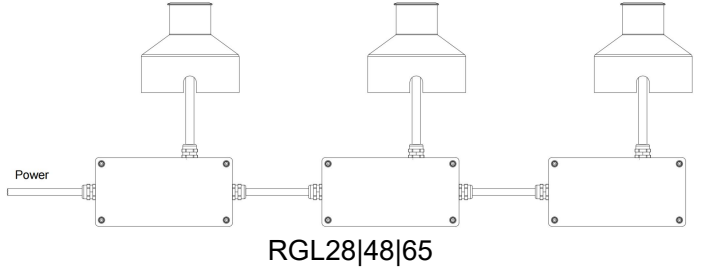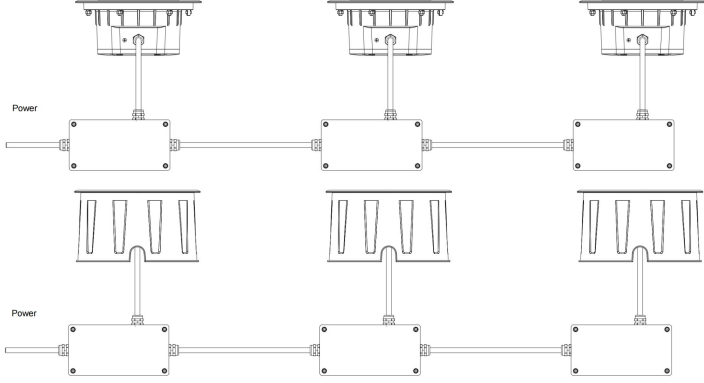ON/OFF AC	
 RGL155 195 265 325 195T 265T	 anti-siphon brown:L green/yellow:E blue:N Power In: 3-core wire lead with anti-siphon
ON/OFF DC	
 RGL28 48 65  RGL155 195 265 325	Cable connector or Wire lead with anti-siphon  Brown Blue  Blue Brown  brown DC24V + blue DC24V - Input: 2-pin Male Connector  anti-siphon brown DC24V + blue DC24V - Input: 2-core wire lead with anti-siphon

DMX Control DC




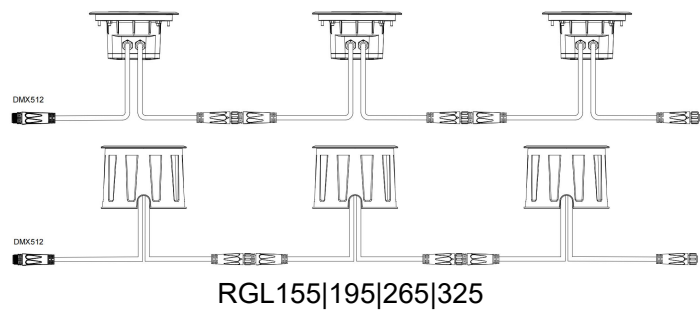
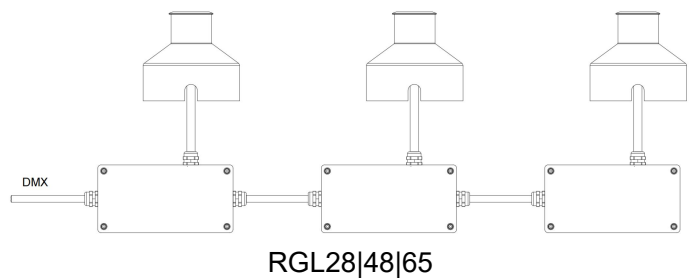


2 cable connector wire (In & Out 5-pin connector)



Power/ Data-Out: 5-pin Female Connector

2 cable connector wire (In & Out 4-pin connector)
& 1 wire lead



Data-Out: 4-pin Female Connector

WARNING & NOTICE

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Before powering up the system, please ensure that the polarity is connected correctly. Incorrect connection may cause product malfunction.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.

