


GOLF-RGLL50|RBL30|RBL50





Thank you for purchasing the ROLEDS product. Please read this manual
carefully before use and keep it for future reference.

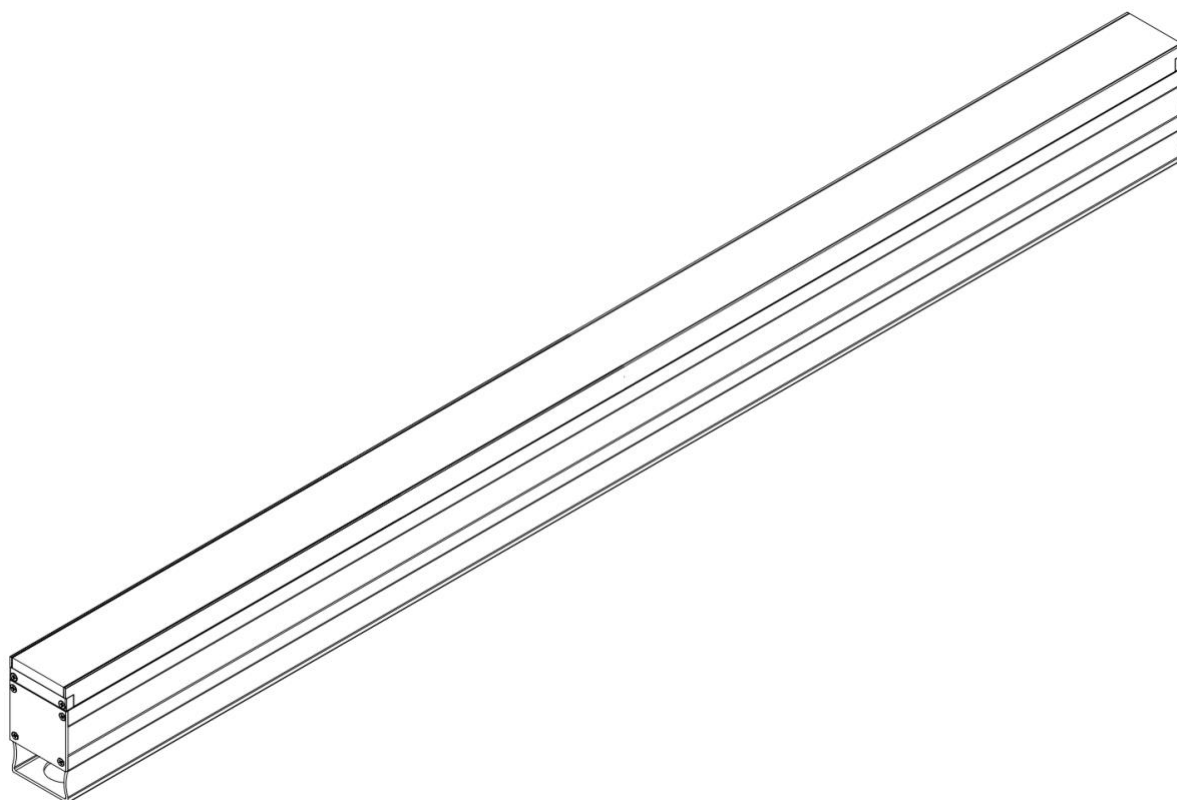


Fixture must be installed by a qualified electrician in accordance with all national and local electrical
and construction codes and regulations. This device falls under class one and must be grounded!



STEP 1: Luminaire Installation

Use embedded parts that are appropriate for use with your mounting surface


RGLL50 (Embedded parts)
1000

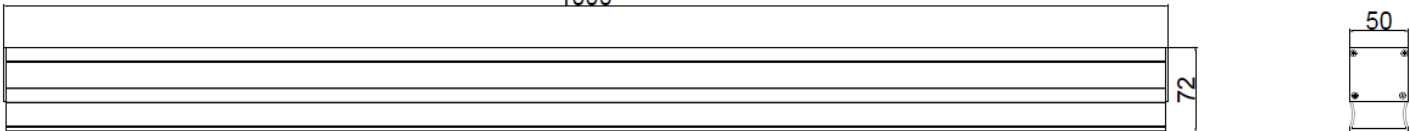



RGLL50 (Luminaire & Luminaire with embedded)

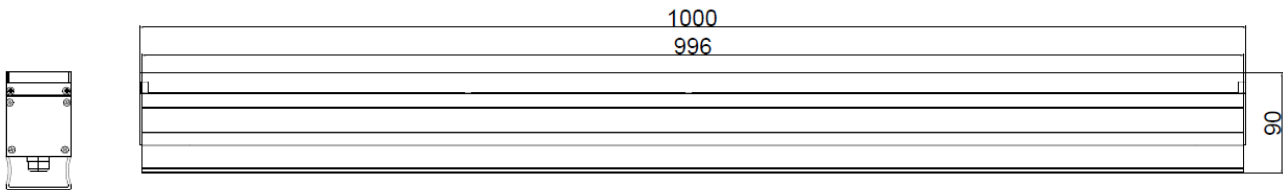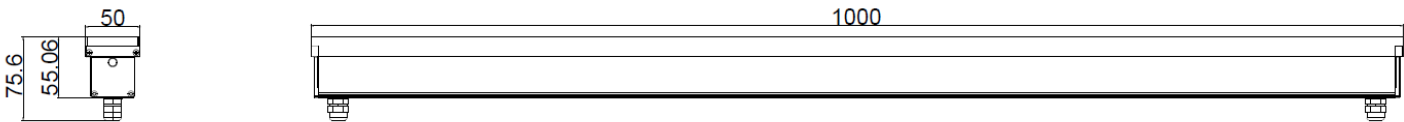


RBL30 (Embedded parts)
1000

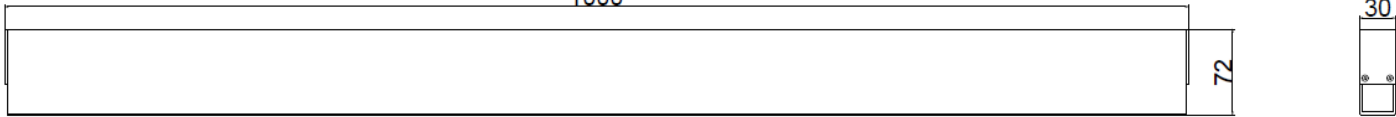



RBL30 (Luminaire & Luminaire with embedded)

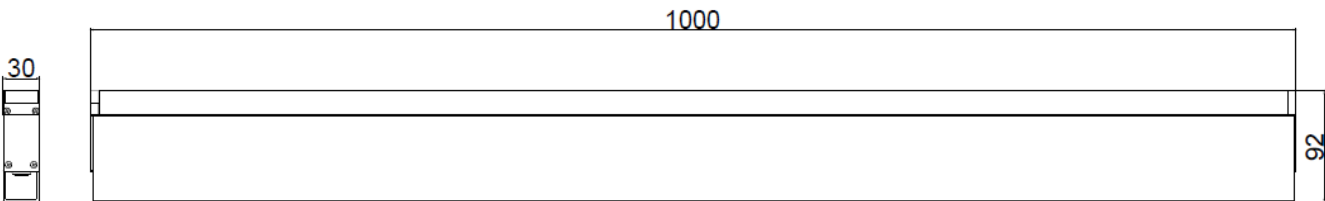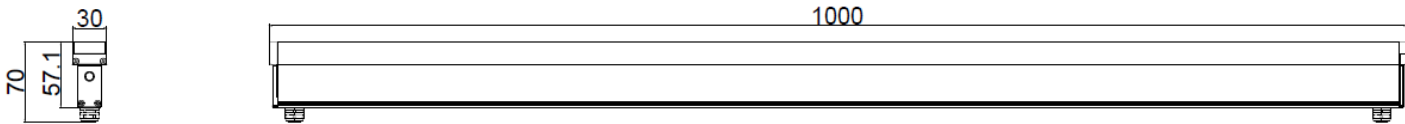

RBL50 (Embedded parts)
1000

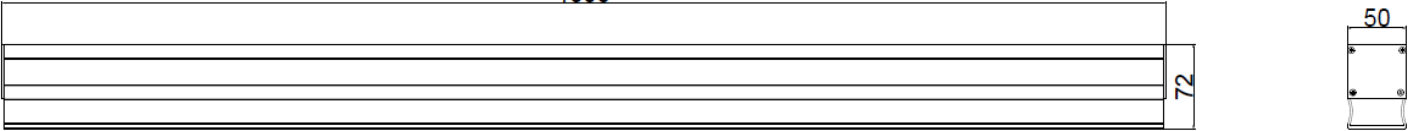


RBL50 (Luminaire & Luminaire with embedded)

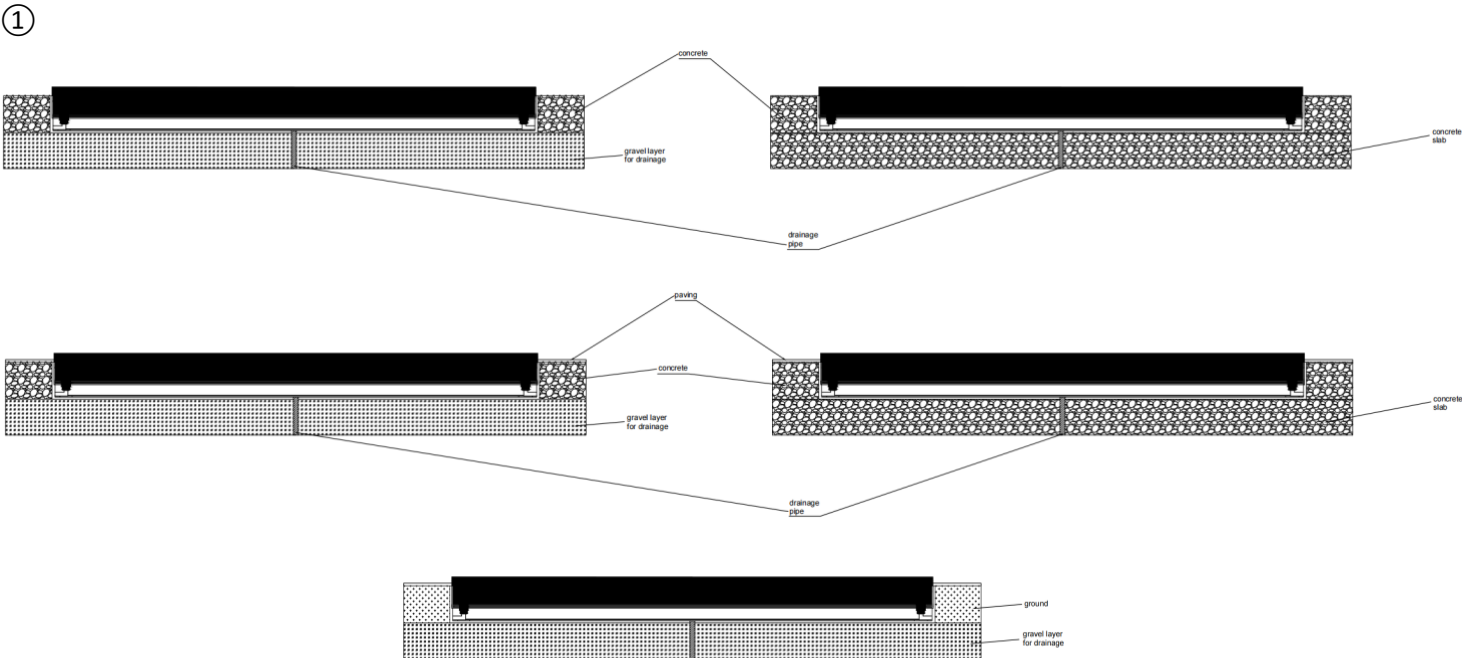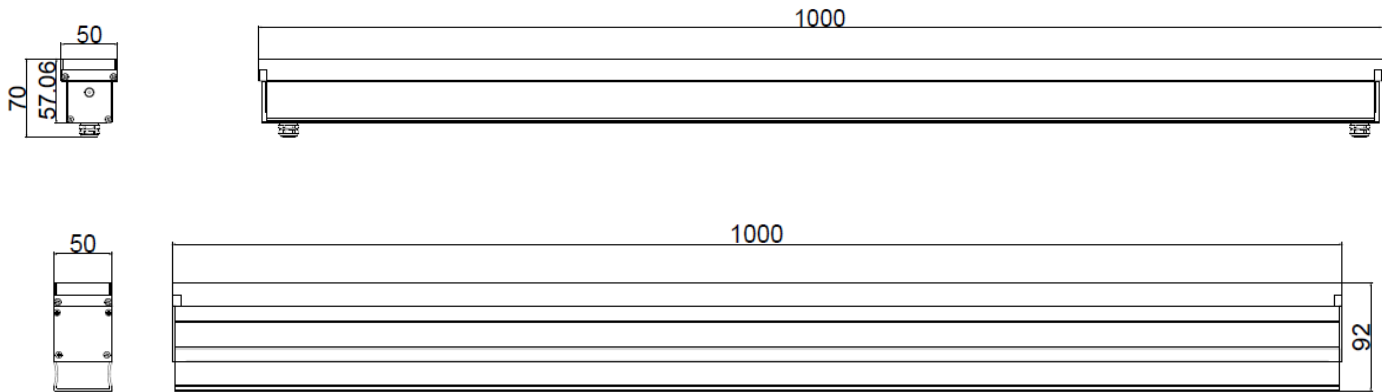


Dig pits according to the size of the embedded parts. All installation positions must comply with those illustrated.

②

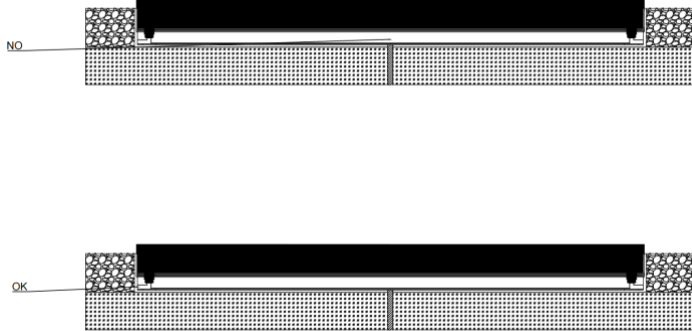

Install the embedded parts at the predetermined lamp installation position. Arrange the cables on the sides of the luminaires as indicated.

③

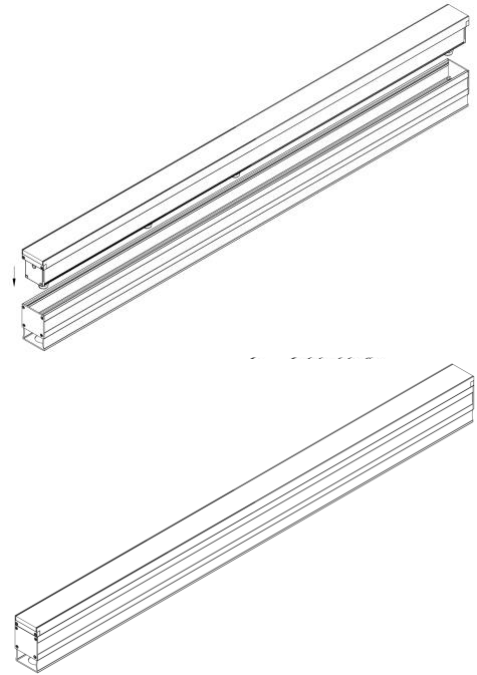




Place the light fixture into the embedded parts.

STEP 2 Wiring Cable Installation

The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.




ON/OFF DC

Cable connector or Wire lead with anti-siphon

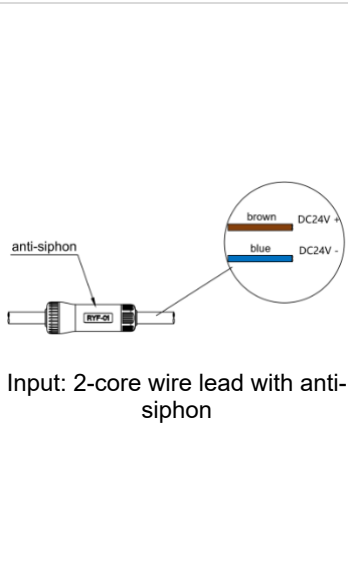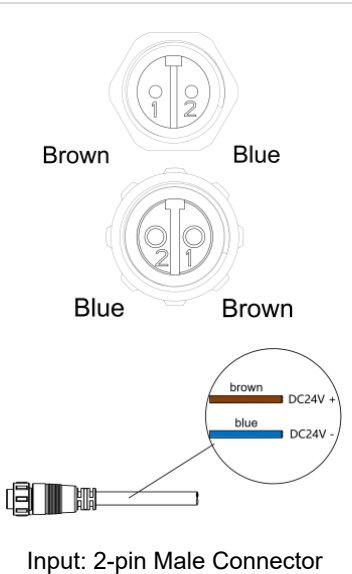
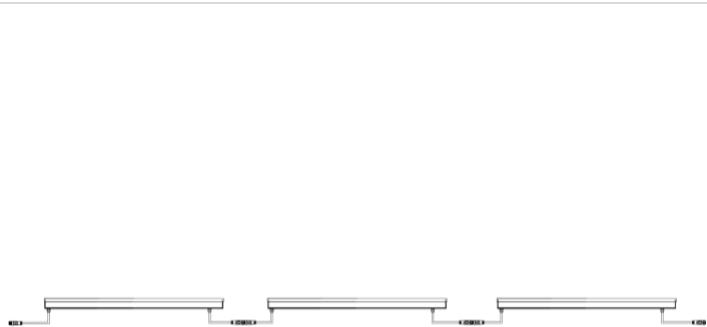


DMX Control DC

2 cable connector wire (In & Out 5-pin connector)

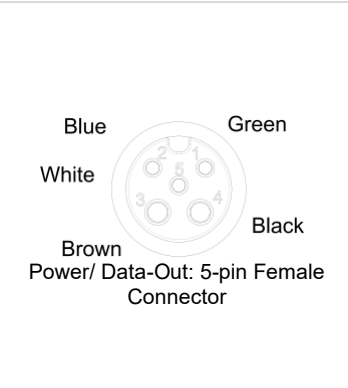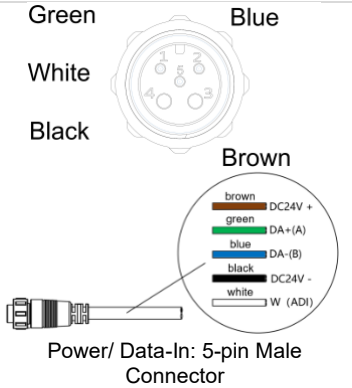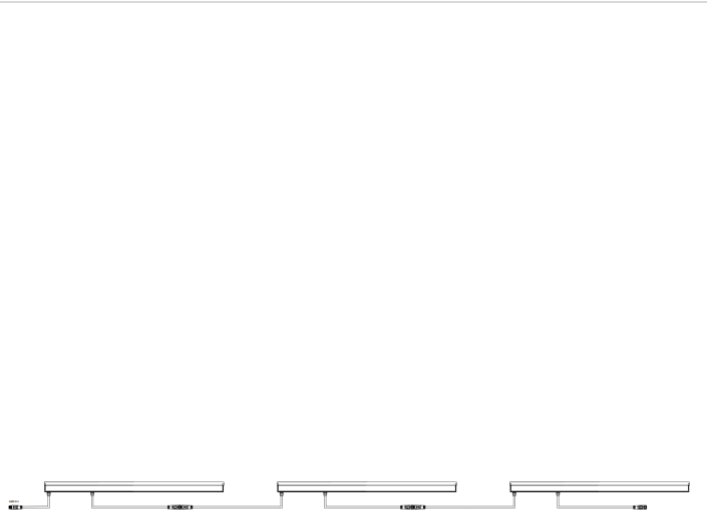

2 cable connector wire (In & Out 4-pin connector) & 1 wire lead

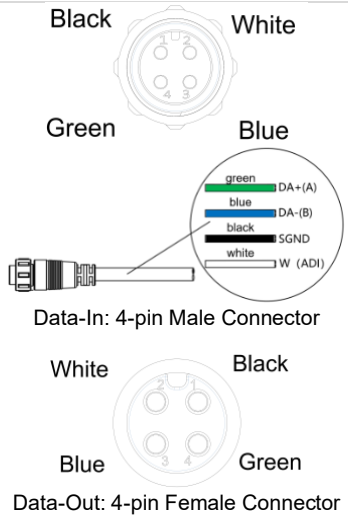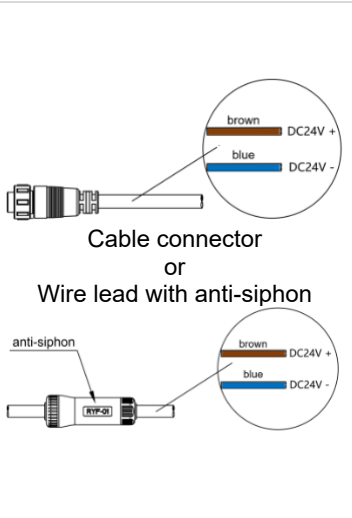

1. To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
2. Wire the power supply to the electrical mains only after the connection to the products has been carried out.
3. The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
4. Do not install the fixture in areas where water tends to collect.
5. Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
6. Should the glass break, the product cannot be used.
7. Do not stare at the operating lighting source.
8. Do not submit the product to twisting.
9. After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$
10. Fixtures not suitable to be covered in thermally-insulating material.

