


MatriX-RCL22P



Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

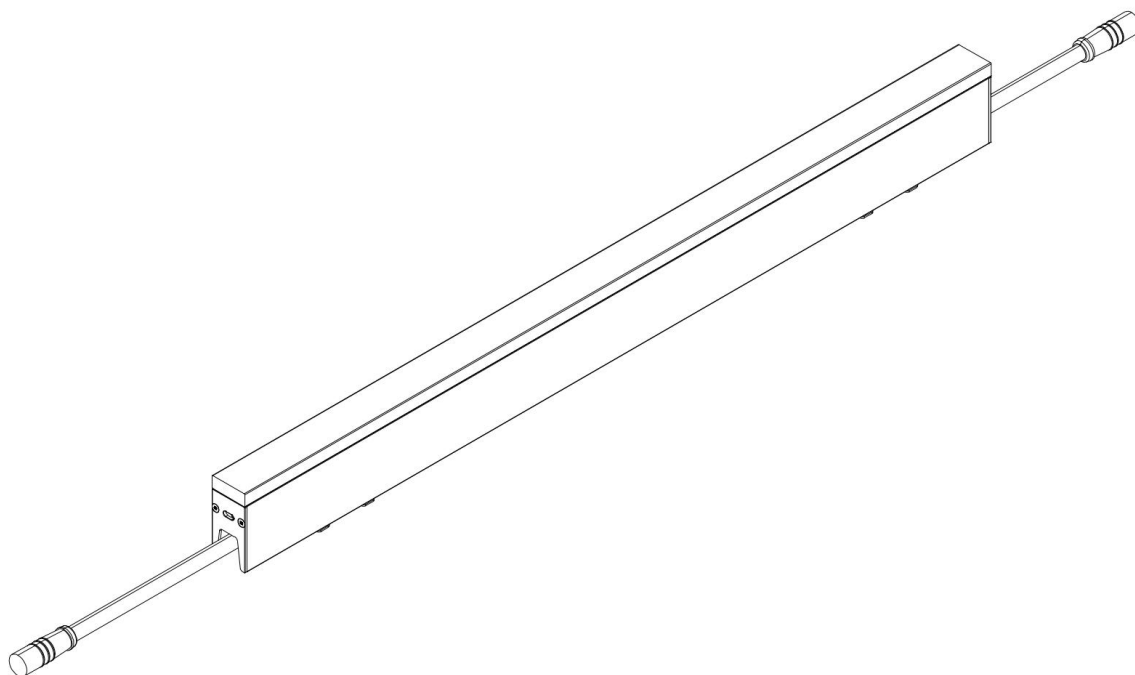

Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!




STEP 1: Bracket Installation

This luminaire is equipped with three types of bracket accessories. Please select the appropriate bracket according to your needs.


A. Clip Bracket

①




Drill holes in the mounting surface according to the provided bracket dimensions.

②

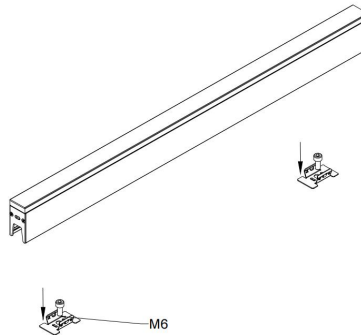

Fasten the brackets with screws.


③

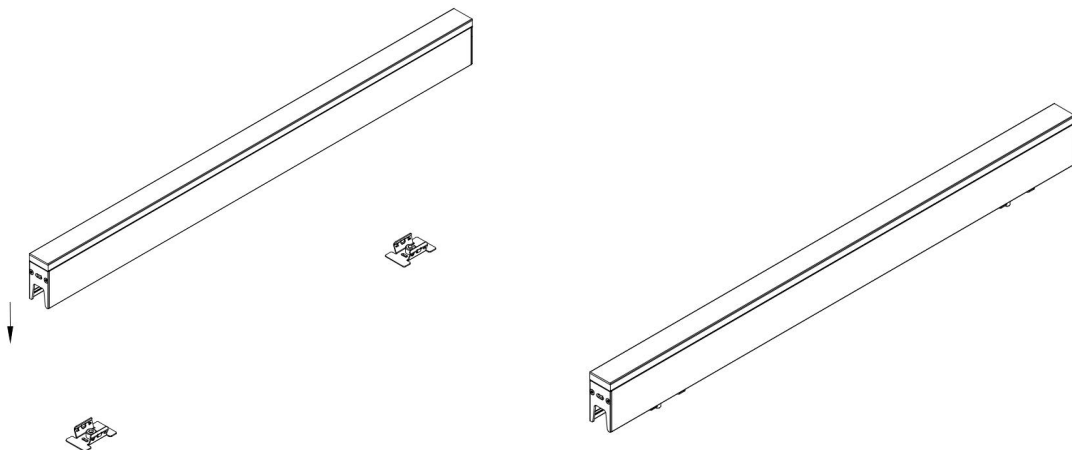

Fit the luminaire into the brackets.


B. Screw-in Bracket

①




Drill holes in the mounting surface according to the provided bracket dimensions.

②

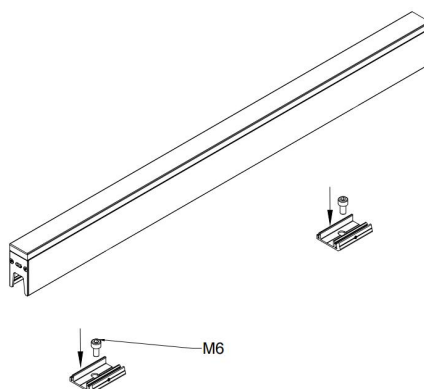

Fasten the brackets with screws, then fit the luminaire into the brackets.


③

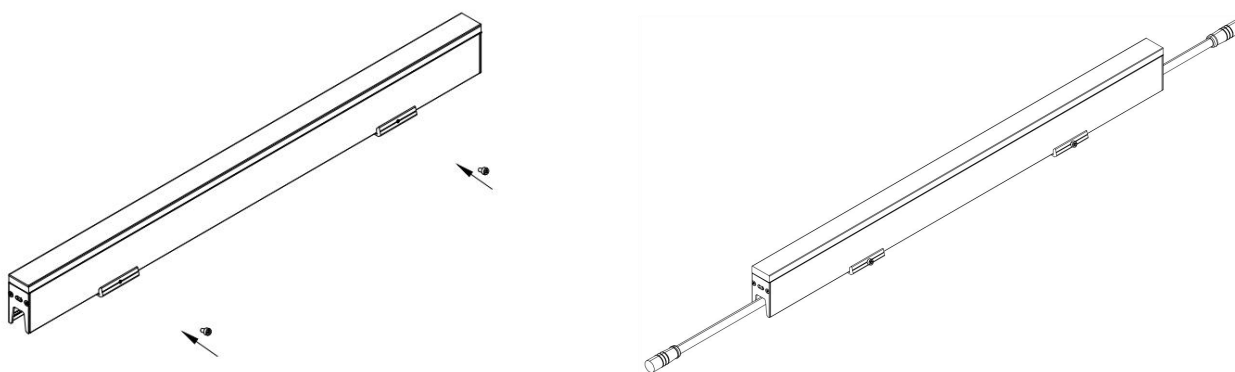

Install screws on the sides of the two brackets to secure the luminaire.


C. Adjustable Bracket

①




Drill holes in the mounting surface according to the provided bracket dimensions.

②

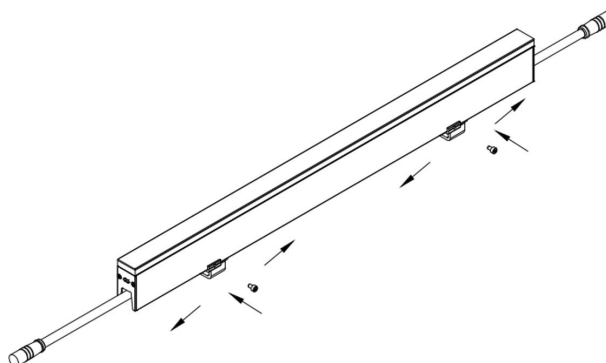

Loosen the screws on the sides of the luminaire, and slide the brackets to the appropriate position, then retighten the screws on the sides of the luminaire.







③

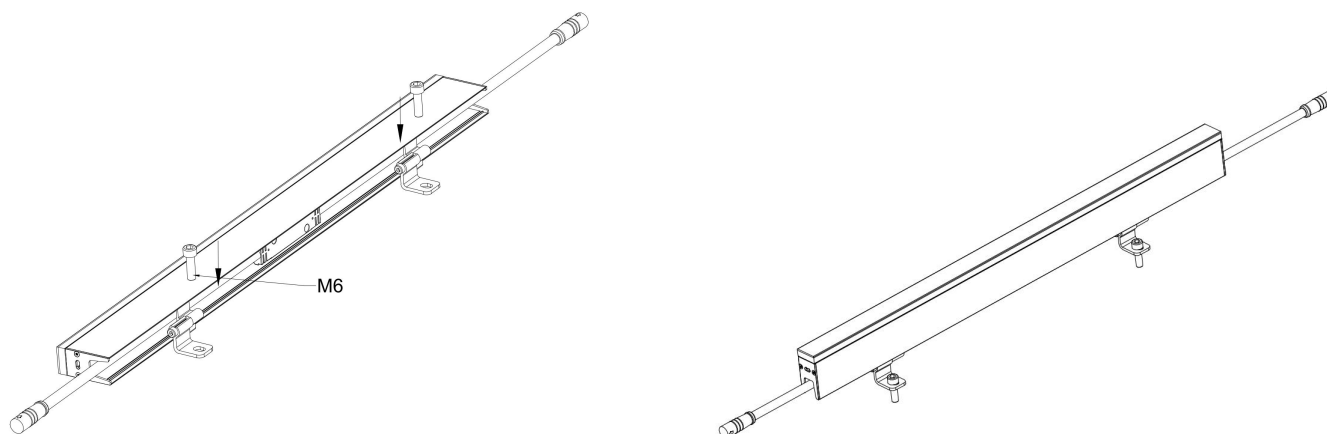

Loosen the screws on the sides of the luminaire, and slide the luminaire to the appropriate position, then retighten the screws on the sides of the luminaire.

STEP 2: Wiring Cable Installation

⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

ON/OFF DC 	Cable connector or Wire lead with anti-siphon  Brown Blue  Blue Brown  Input: 2-pin Male Connector  anti-siphon Input: 2-core wire lead with anti-siphon
DMX Control DC 	2 cable connector wire (In & Out 5-pin connector)  Green Blue White Black Brown  brown DC24V + green DA+ (A) blue DA- (B) black DC24V - white W (ADI) Power/ Data-In: 5-pin Male Connector  Blue Green White Brown Black Power/ Data-Out: 5-pin Female Connector

WARNING & NOTICE

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Do not submit the product to twisting.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.

