


RPW01



Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.





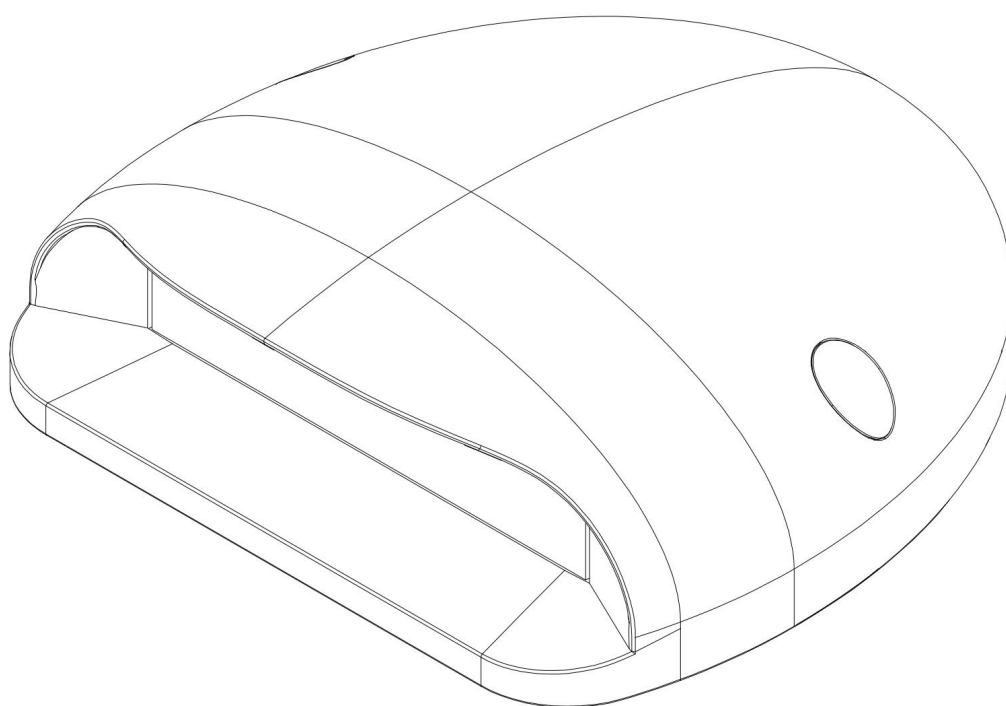


Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!





RPW011 Size : 104*104*35mm Weight : 0.3kg

RPW012 Size:143*143*45mm Weight:0.5kg



STEP 1: Luminaire Installation


①

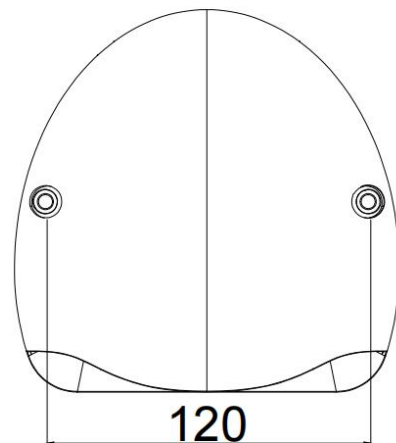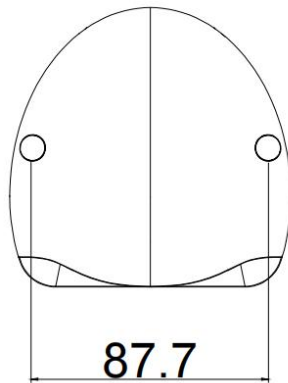

Place the luminaire on a flat surface, mark the positions of two holes according to the given dimensions, and then drill holes at the marked positions.

Notes: The distance between the installation holes of two types of luminaires is different.


②

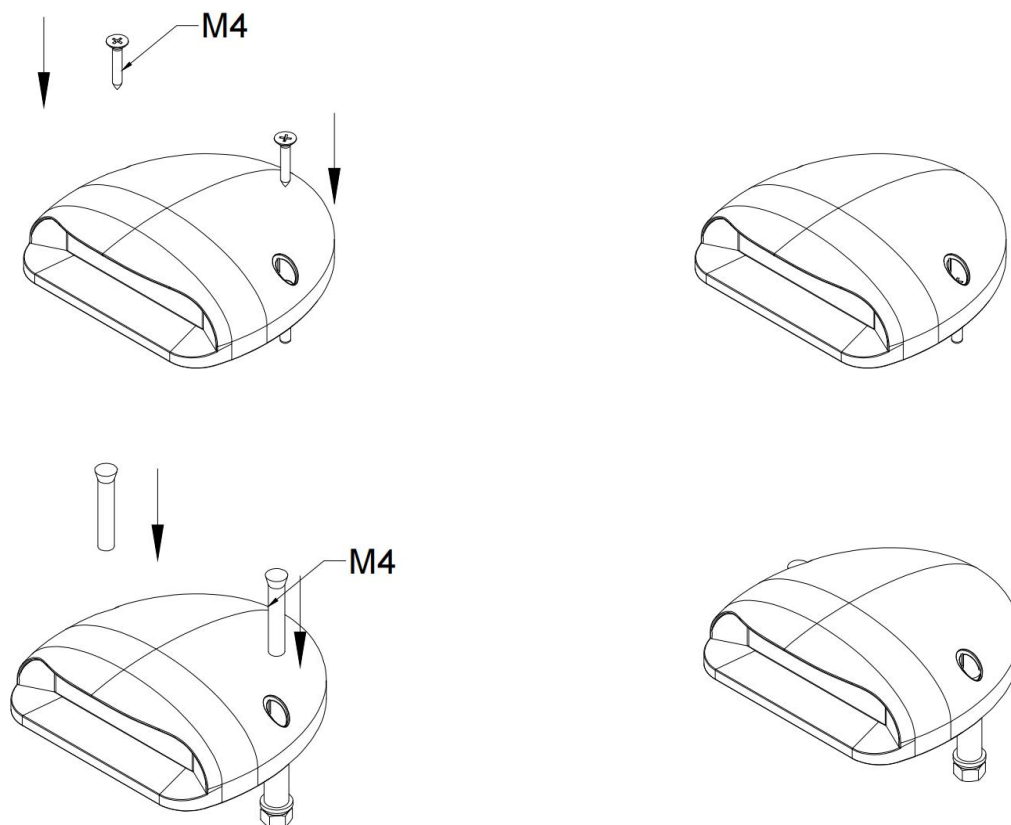

Insert the lower half of the expansion screws into the holes, align the luminaire with the two holes and place it on the road surface, then install the upper half of the screws.

Notes: Different expansion screws can be selected based on the material of the road.







③

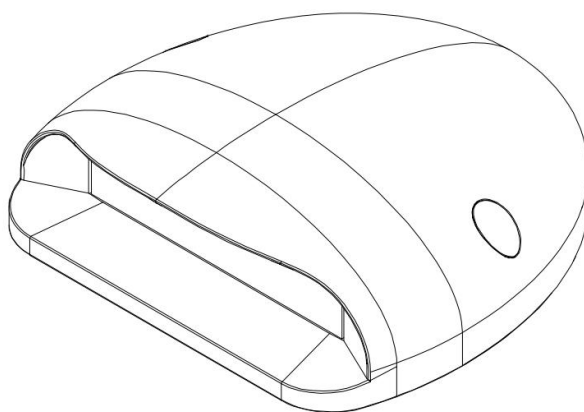

Install the sealing covers above the screws.

STEP 2: Wiring Cable Installation

⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

DMX Control DC 	2 cable connector wire (In & Out 5-pin connector)	
	Green Blue White Black Brown  brown green blue black white DC24V + DA+ (A) DA- (B) DC24V - W (ADI)  Power/ Data-In: 5-pin Male Connector	Blue Green White Black Brown  Power/ Data-Out: 5-pin Female Connector
	2 cable connector wire (In & Out 4-pin connector) & 1 wire lead	
	 brown blue DC24V + DC24V - Cable connector or Wire lead with anti-siphon anti-siphon  brown blue DC24V + DC24V -	Black White Green Blue  green blue black white DA+ (A) DA- (B) SGND W (ADI)  Data-In: 4-pin Male Connector White Black Blue Green  Data-Out: 4-pin Female Connector

WARNING & NOTICE

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.

