


RWLTy35





Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

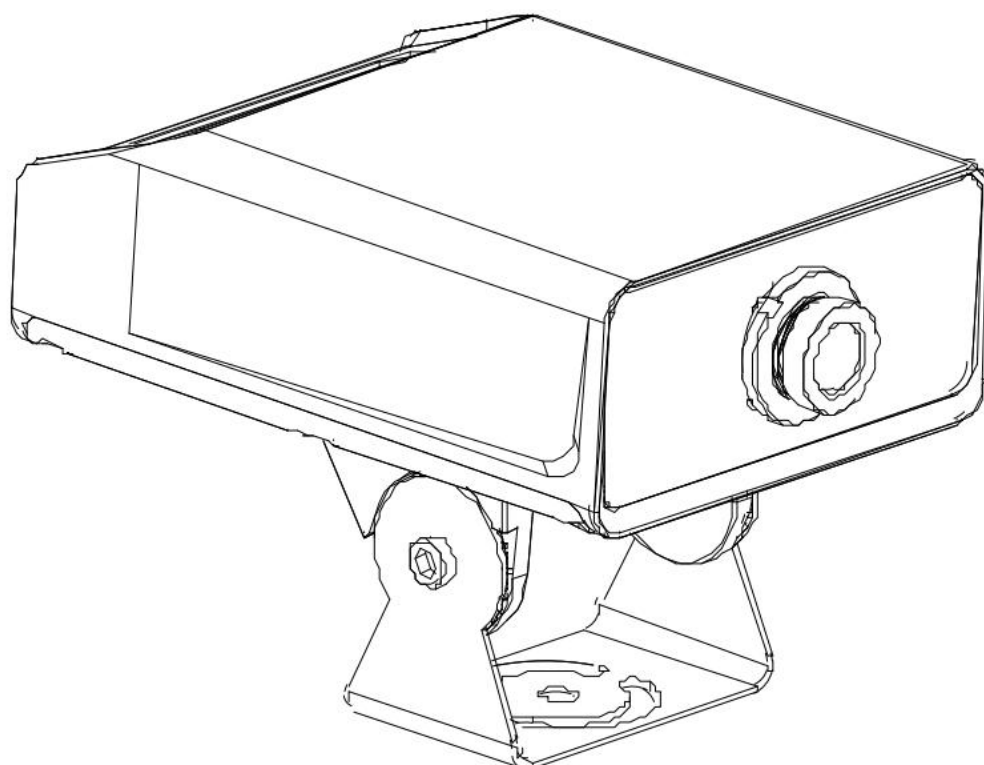


Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!

Note: There are four mounting methods available. **Type A and Type B are both surface mounting**, differing only in the fastener configuration used; please select the appropriate method based on the material of the mounting surface. **Type C is pole mounting**, and **Type D is ground spike mounting**.

STEP 1: Bracket Installation


A.

①

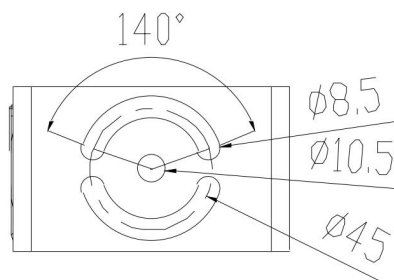

Drill a hole on the mounting surface in accordance with the specified dimensions.


②

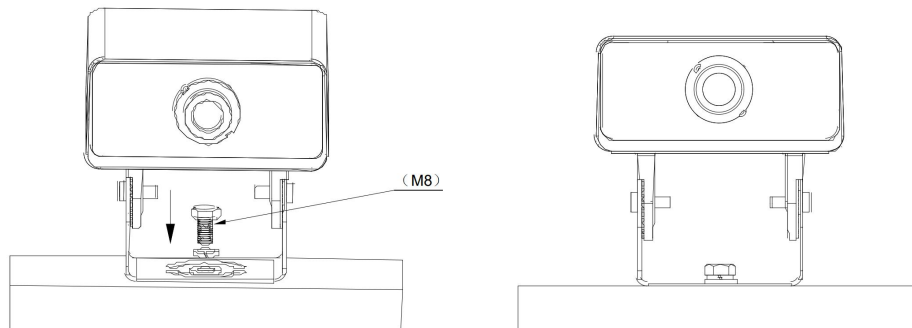

Fasten the bracket of the fixture to the surface with a washer, a spring washer and a screw.


B.

①

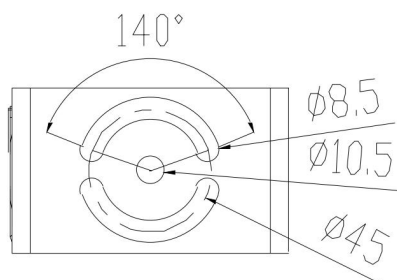


Drill a hole on the mounting surface in accordance with the specified dimensions.

②

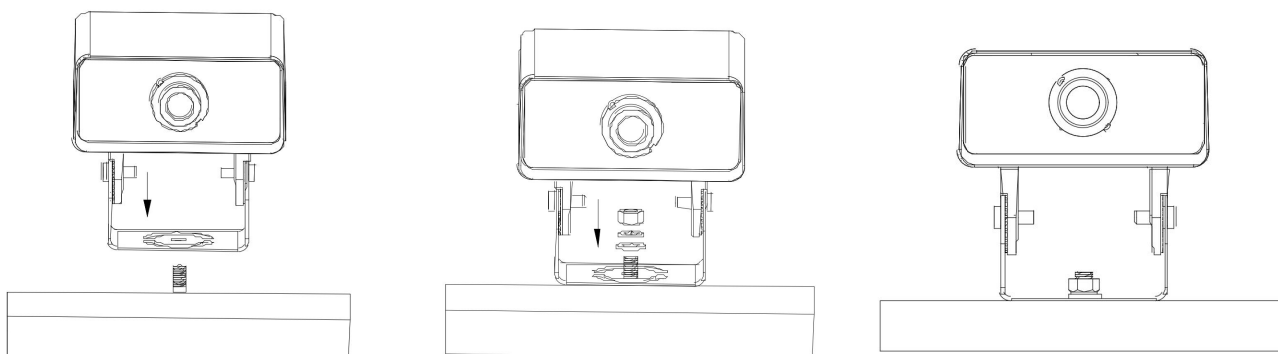


Install a screw at the pre-drilled hole. Place the bracket over the screw, then secure the bracket to the mounting surface with a washer, a spring washer and a nut.

C.

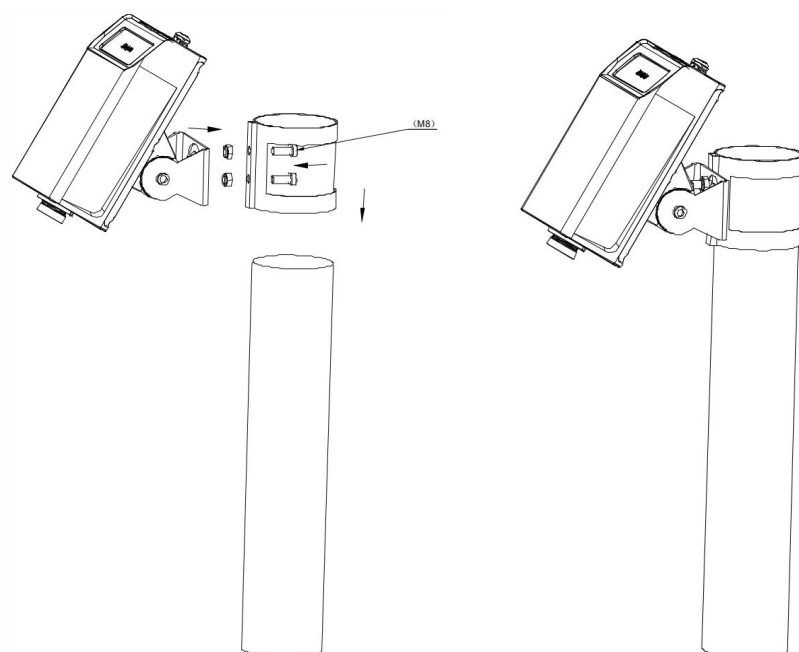

First pass the screws through from the inside of the bracket. Then fit the bracket over the top of the lamp pole. After adjusting the position, tighten two nuts onto the exposed parts of the screws to secure the bracket to the lamp pole.


D.

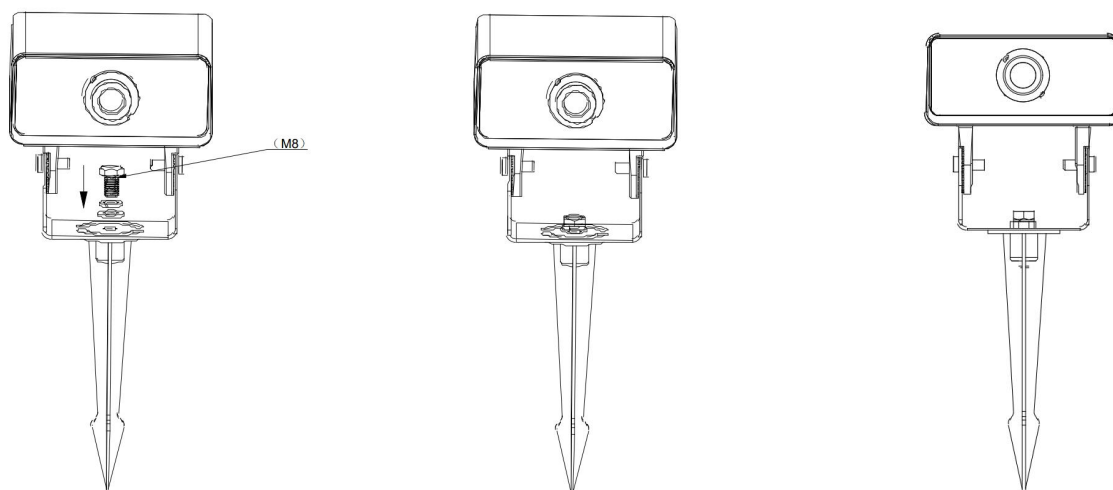

Install an M8 screw through the projector bracket and the ground spike. Secure the assembly to the ground spike with a washer, a spring washer, and a nut from the underside.


STEP 2: Tilt Angle Adjustment

①

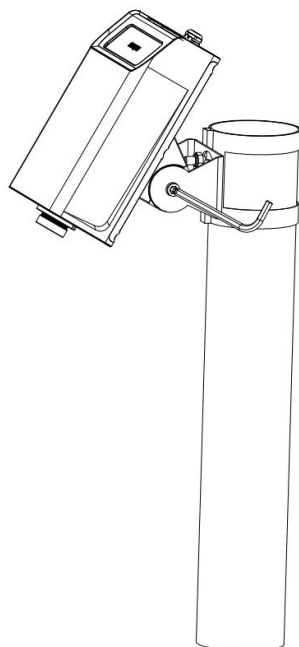


②


A / B / C :

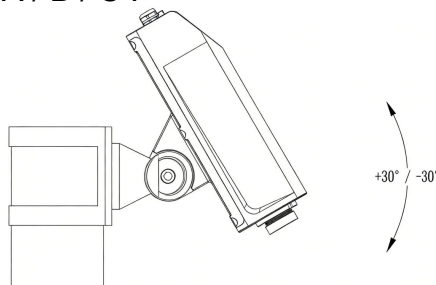

③

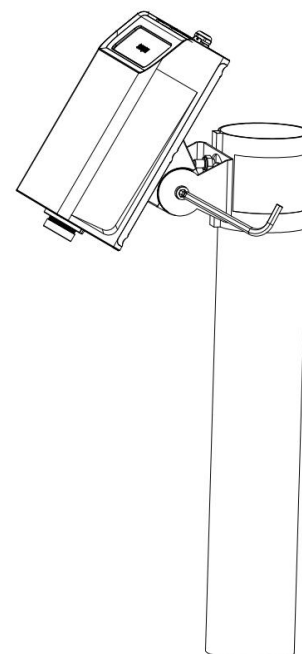

D:

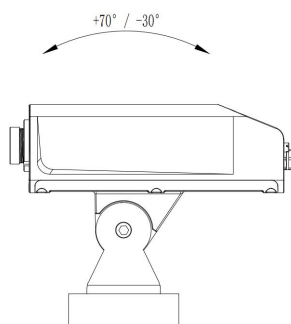


Loosen the screws on both sides of the luminaire with an Allen key to unlock the tilt joint.

Tilt the luminaire to the desired angle within $+30^{\circ}/-30^{\circ}$ for mounting types A/B/C, or $+70^{\circ}/-30^{\circ}$ for type D.

Retighten the screws firmly to fix the luminaire at the set angle.


STEP 3: Lens Focus Adjustment

①

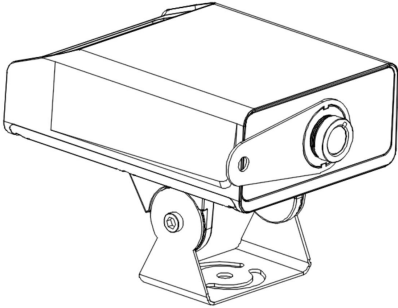


Loosen the lens lock ring by turning it counterclockwise.

②

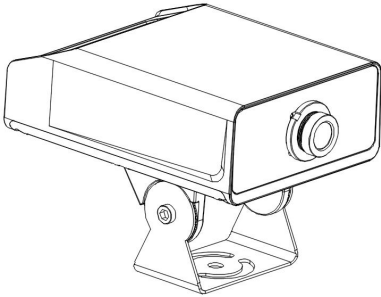

Adjust the lens forward or backward until the projected image is clear.

③



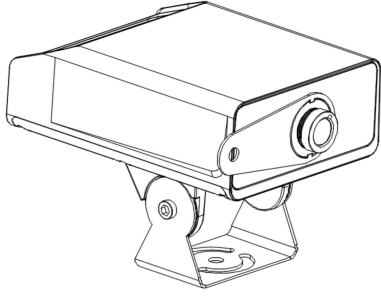


Tighten the lens lock ring clockwise to secure the lens and complete the focus adjustment.

STEP 4: Wiring Cable Installation

⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

DMX Control AC

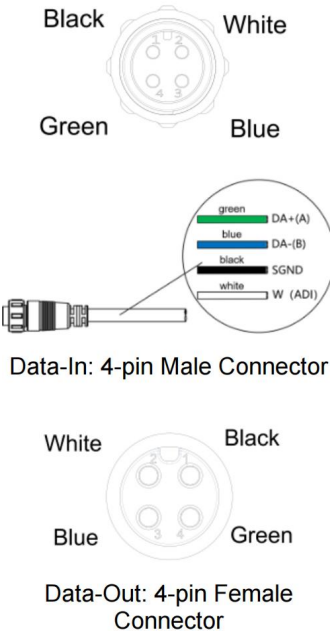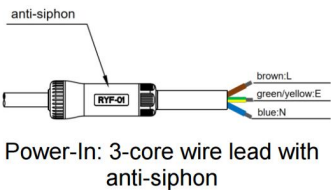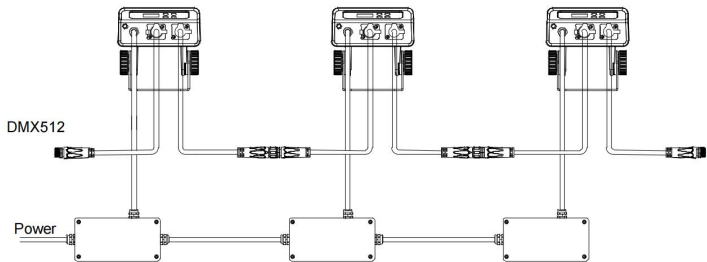

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Before powering up the system, please ensure that the polarity is connected correctly. Incorrect connection may cause product malfunction.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.
- ⚠ Secondary protection is required for bare wire connections: For a single core, first wrap it with waterproof tape and then insulate it with electrical tape; then wrap the entire core assembly with waterproof tape again, followed by insulation with electrical tape (Note: This method is not recommended as it does not comply with specifications).
- ⚠ The luminaire must be reliably grounded.

