



GOLF-RDO90|120|150




Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

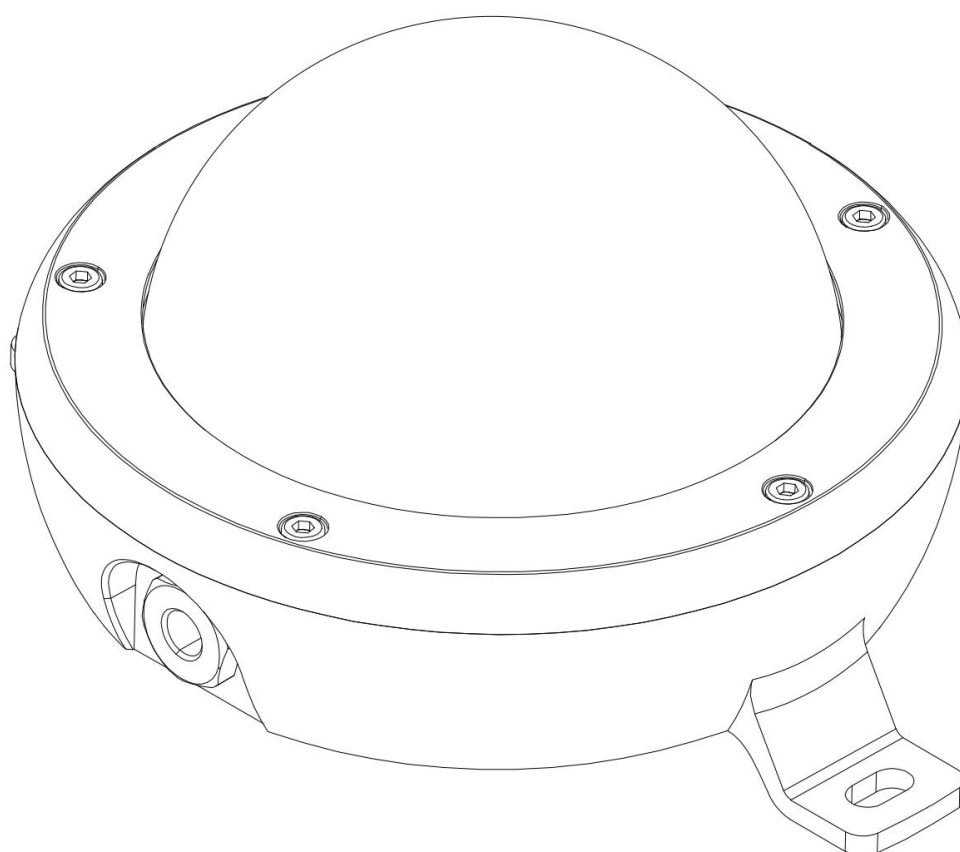


Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!



RDO90



RDO120



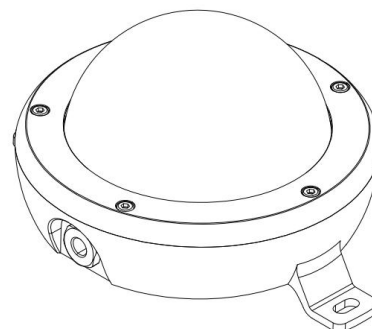


RDO150

STEP 1: Bracket Installation



Use fasteners that are appropriate for use with your mounting surface.

①

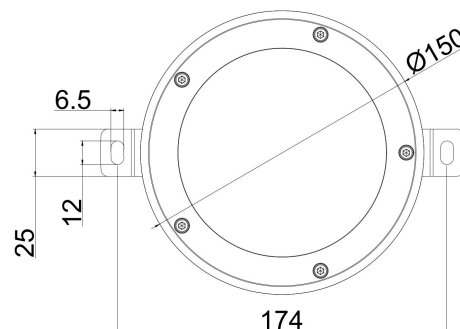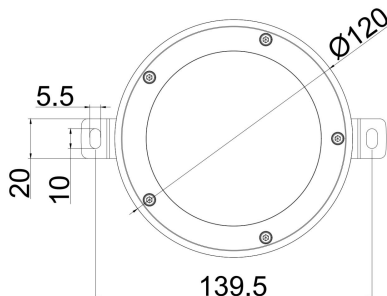

②








Drill two holes into the surface according the given dimensions.

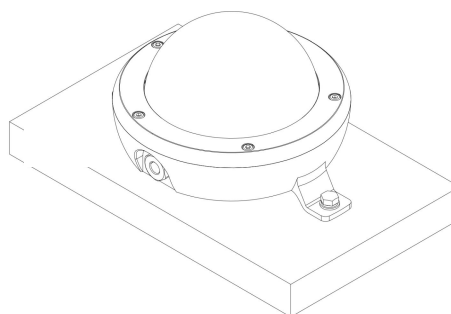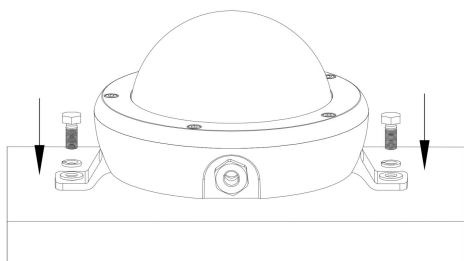

Fasten the Bracket of the fixture to the surface by two washers, spring washers and screws.

STEP 2: Wiring Cable Installation

⚠ The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

DMX Control DC 	2 cable connector wire (In & Out 5-pin connector)	
	Green Blue White Black Brown   Power/ Data-In: 5-pin Male Connector	Blue Green White Brown Black  Power/ Data-Out: 5-pin Female Connector
	2 cable connector wire (In & Out 4-pin connector) & 1 wire lead	
	 Cable connector or Wire lead with anti-siphon   	Black White Green Blue   Data-In: 4-pin Male Connector White Black Blue Green  Data-Out: 4-pin Female Connector

WARNING & NOTICE

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Before powering up the system, please ensure that the polarity is connected correctly. Incorrect connection may cause product malfunction.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.

