




GOLF-RFL140R COB



OPTIC OPTIONS



ACCESSORIES

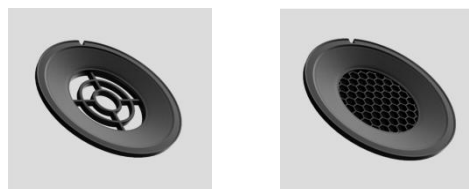

Bullseye Louvre (Y9)

Honeycomb Louvre (Y2)

SPECIFICATIONS AVAILABLE FOR RFL140R COB

Sample Part Number: **RFL140R-20W-1K-K27-D48-15D-CL-N-a-HS**

FIXTURE TYPE	WATTAGE	LEDs	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/CUSTOMIZATION*
RRL140R	20W	1K	K27	D48	15D	CL	N	a	HS
RFL140R	20W	1K LEDs x 1	K27 2700K K30 3000K K40 4000K K50 5000K K57 5700K K27K57H Tunable White: 2700K~5700K	D48 48VDC	15D 15° 22D 22° 36D 36°	CL On-Off DMX DMX512 DALI DALI	N None Y2 Honeycomb Louvre Y9 Bullseyes Louvre	a U-Bracket JY Clamp Bracket for ø60~90mm Pole	HS RAL9001 RAL# Custom RAL# Y Anti-fallen Chain

SPECIFICATION SHEET


FLOOD LIGHT




SPECIFICATION

ELECTRICAL	Input Voltage	48VDC (External PSU, Build-in LED driver)	
	Typical Power Consumption	Max.20W ±10%	Max.15W ±10% (ta 55°C)
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K (SDCM ≤ 5)	
		Bi-Color: 2700K & 5700K (SDCM ≤ 5)	
	Beam Angle (FWHM)	15° 22° 36° (LEDs x1)	
	Efficacy (lm/W)	Mono: 57~62; Tunable White: 60~63 (±10%)	
CONTROL	Operating Modes	On-Off; DMX; DALI	
	Control System	DMX512 Controllers DALI Controller	
	Settings / Addressing	DMX Communicator DALI Addressing	
PHYSICAL	Length x Width x Height Weight	157mm x 140mm x 165mm 1.6kg	
	Housing	Body: Die-cast Aluminum ADC12	Bracket: SGCC
		Cover: Tempered Glass	
	Optical Material	PC	
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DMX/DALI
		2 Core Cable with Male/Female Connector (2x1mm ² Cable Power IN/OUT)	5 Core Cable with Male/Female Connector (2x1mm ² Power + 3x0.3 mm ² Signal IN/OUT)
	Mounting Method	U-Bracket	
	Adjustable	Yes	
	Protection Factor	Class III	
	IP IK Rating	IP66 IK07	
	Operating Ambient Temperature	-40°C ~ +45°C	-40°C ~ +55°C (For Mid-East Area)
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Anti-glare parts (Code)	Mounting Brackets (Code)
	Honeycomb Louvre	Y2	
	Bullseyes Louvre	Y9	
	Clamp Bracket for Ø60~90mm Pole	JY	

PHOTOMETRIC DATA

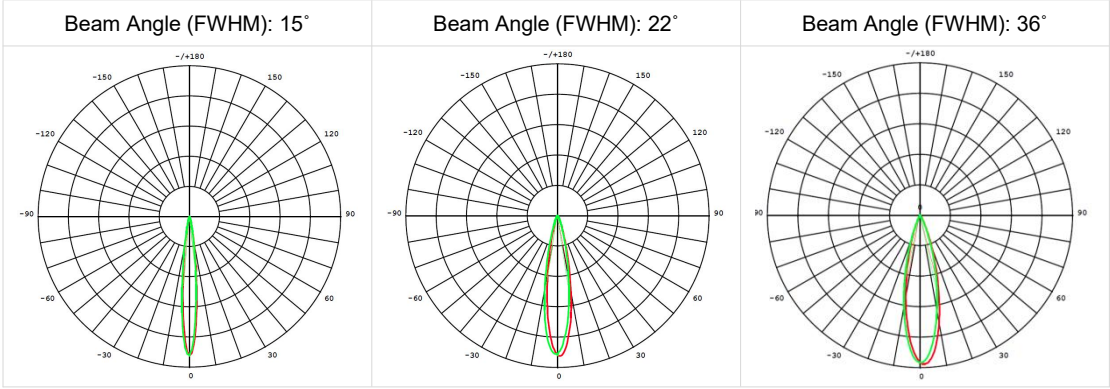

DIMENSIONS

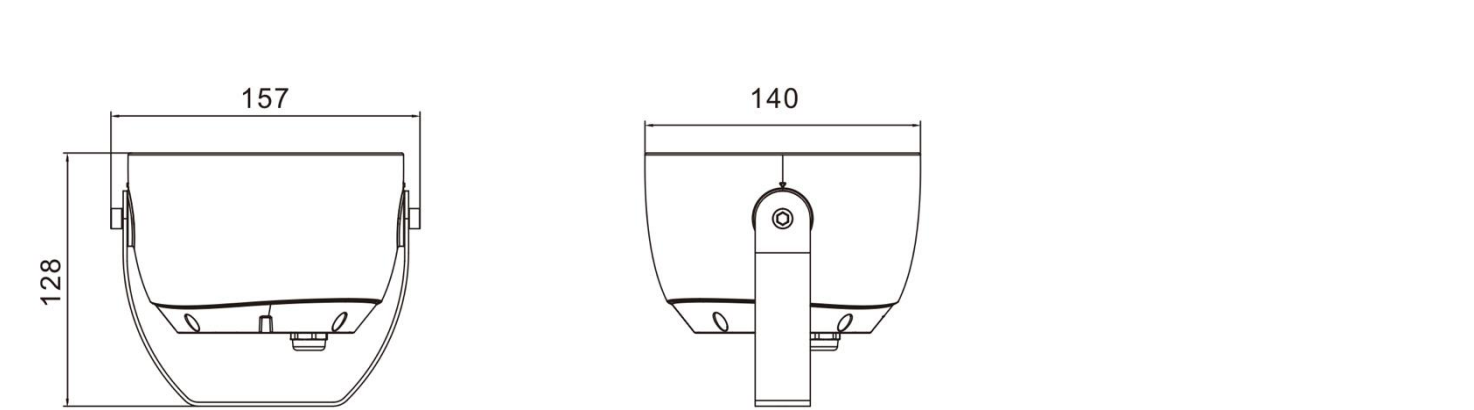

ACCESSORIES

Honeycomb Louvre (Y2)	Bullseye Louvre (Y9)	Clamp Bracket for ø60~90mm Pole (JY)