



GOLF-RFL350R



OPTIC OPTIONS

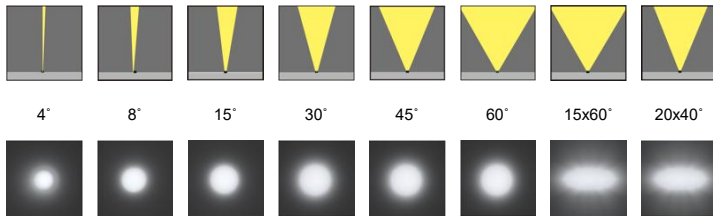

ACCESSORIES



Bullseye Louvre (Y9)



Cylindrical Screen (Y)

SPECIFICATIONS AVAILABLE FOR RFL350R


Sample Part Number: **RFL350R-90W-36K-K27-A-4D-CL-N-a-HS**

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RRL350R	90W	36K	K27	A	4D	CL	N	a	HS
	90W	36K LEDs x36	K27 2700K	A 220VAC	4D 4° (only mono, R/G/B/W)	CL On-Off DMX DMX512 DALI DALI	N None Y Cylindrical Screen Y9 Bullseyes Louvre	a U-Bracket	HS RAL9001
			K30 3000K		RAL# Custom RAL#				
			K40 4000K						Y Anti-fallen Chain
	150W	60K LEDs x60	K50 5000K	8D 8° (only mono, R/G/B, R/G/B/W)	15D 15° 30D 30° 45D 45° 60D 60° (only mono, R/G/B, R/G/B/W) 15x60D 15x60° 20x40D 20x40°				
			K57 5700K						
			K65 6500K						
	180W	72K LEDs x72	RGB R/G/B	RGBW R/G/B/W RGBH RGB3in1 (only 150W/180W) RGBWH RGBW4in1 (only 150W/180W)					

SPECIFICATION

ELECTRICAL	Input Voltage	220VAC (Build-in LED driver)		
	Typical Power Consumption	Max.90W ±10% Max.150W ±10% Max.180W ±10% Max.135W ±10% (@Ta. 55°C)		
OPTICAL	Light Source	High Power LED		
	Color Variants	Mono:	2700K 3000K 4000K Ra.≥80 (R9≥0, SDCM ≤ 5) 5000K 5700K 6500K Ra.≥70 (R9≥0, SDCM ≤ 5)	
		Color:	R/G/B R/G/B/W RGB 3in1 RGBW 4in1	
	Beam Angle (FWHM)	Mono:	4° (LEDs x36) 8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x60, LEDs x72)	
		R/G/B:	8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x60, LEDs x72)	
		R/G/B/W:	4° (LEDs x36) 8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x60, LEDs x72)	
		RGB 3in1 RGBW 4in1:	15° 30° 45° 15x60° 20x40° (LEDs x60, LEDs x72)	
	Efficacy (lm/W)	Mono: 40~74 (±10%); Color: 42 (±10%)		
CONTROL	Power Supply	Integrated		
	Operating Modes	On-Off; DMX; DALI		
	Control System	DMX512 Controllers DALI Controller		
	Settings / Addressing	DMX/RDM Communicator DALI Addressing		
PHYSICAL	Width x Height x Depth Weight	376mm (L) x 204mm (W) x 429.5mm (H) 12kg		
	Housing	Body: Die-casting Aluminum ADC12		Bracket: SGCC
		Cover: Tempered Glass		
	Optical Material	PC	Mono: 8°	
			RGB(3in1): 15/30/45/60/20°40/15°60°	
		PMMA	RGBW(4in1): 15/30/45/60/20°40/15°60°	
			Mono: 4° (Lens: PMMA, Bracket: PC)	
	Finish Options	Standard Color		Graphite Black RAL 9011
		Cost Option		Custom RAL #
	Cables / Connections	ON/OFF		DMX
		3 Core Wire Lead Cable (3x1.0 mm² Cable Power IN)		Wire Lead Cable (3x 1.0 mm² Power IN)
				4 Core Cable Male/Female Connector (4x0.3 mm² Signal IN/OUT)
	Mounting Method	U-Bracket		
	Adjustable	Yes		
Protection Factor	Class I			
IP IK Rating	IP66 IK08			
Operating Ambient Temperature	-40°C ~ +50°C		-40°C ~ +55°C (For Mid-East Area)	
CERTIFICATION	Listings	CE, RoHS		
ACCESSORIES	Not Included Items	Anti-glare parts (Code)		
	Cylindrical Screen	Y		
	Bullseyes Louvre	Y9		

PHOTOMETRIC DATA

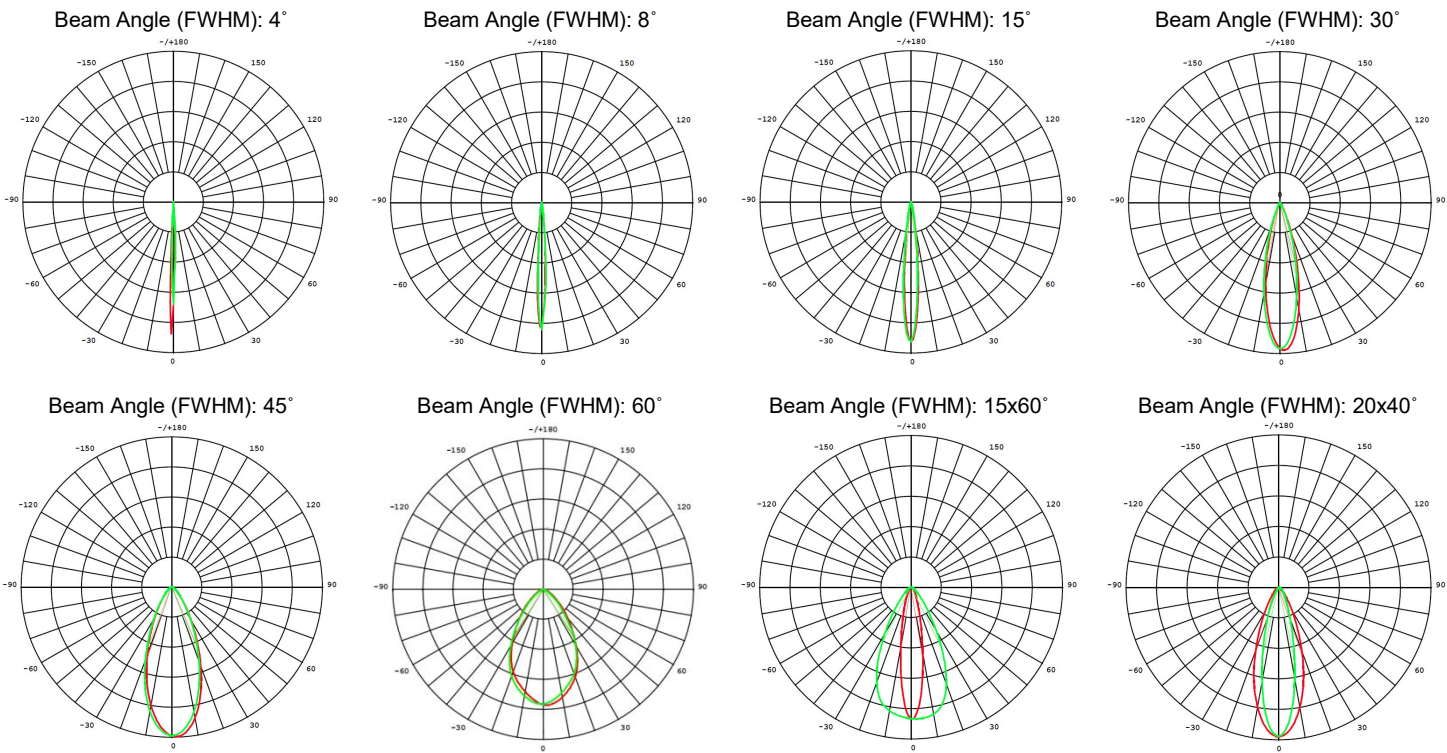

DIMENSIONS

