

SPECIFICATION SHEET
INGROUND LIGHT




GOLF - RGL65



DMX 512, -40 ~ +55°C, 2700-6500K, IP67, IK07, DC 12V, DC 24V, III, CE

OPTIC OPTIONS ACCESSORIES

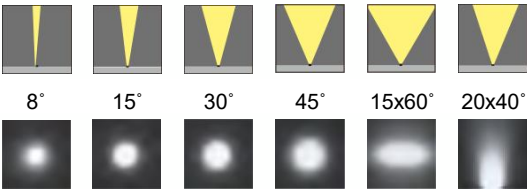

Honeycomb Louvre (Y2)

SPECIFICATIONS AVAILABLE FOR RGL65

Sample Part Number: RGL65-1W-1K-K27-D24-8D-CL-Y2-N-RAL#

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/CUSTOMIZATION*
RGL65	1W 3W	1K LEDs x 1	K27 K40 K65	D12 D24	8D 15D 30D 45D 15x60D 20x40D	CL DMX	Y2	N	RAL#
			RGBWH RGBW(4in1)		15D 30D 45D 15x60D 20x40D				


SPECIFICATION SHEET

INGROUND LIGHT



SPECIFICATION			
ELECTRICAL	Input Voltage	12VDC 24VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max. 1W ±10% 3W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 3000K 4000K Ra.≥80 (R9≥0); 6000K Ra.≥70 (R9≥0) (SDCM≤5)	
		Color: RGBW(4in1)	
	Beam Angle (FWHM)	Mono: 8° 15° 30° 45° 15x60° 20x40° (LEDs x1)	
		Color: RGBW(4in1) - 15° 30° 45° 15x60° 20x40° (LEDs x1)	
	Efficiency (lm/W)	Mono: 39; Color: 19 (±10%)	
CONTROL	Operating Modes	On-Off; DMX	
	Control System	DMX512 Controllers	
	Settings / Addressing	DMX Communicator	
PHYSICAL	Width x Height x Depth Weight	62mm(L) x 62mm(W) x115.5mm (H) 0.45kg	
	Housing	Body: Stainless Steel SUS304	
		Cover: Tempered Glass	
	Optical Material	PC	Mono: 8°
			RGBW(4in1): 15/30/45/60/20°40/15°60°
		PMMA	Mono: 15/30/45/60/20°40/15°60°
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON / OFF	DMX
		2 Core Cable with Male/Female Connector (2x1mm² Cable Power IN/OUT)	5 Core Cable with Male/Female Connector (2x1mm² Power + 3x0.3 mm² Signal IN/OUT)
	Mounting Method	External Mounting Sleeve	
	Adjustable	No	
	Protection Factor	DC Class III	
	IP IK Rating	IP67 IK07	
	Operating Ambient Temperature	-40°C ~ +55°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Anti-glare Parts (Code)	
	Honeycomb Louvre	Y2	

PHOTOMETRIC DATA

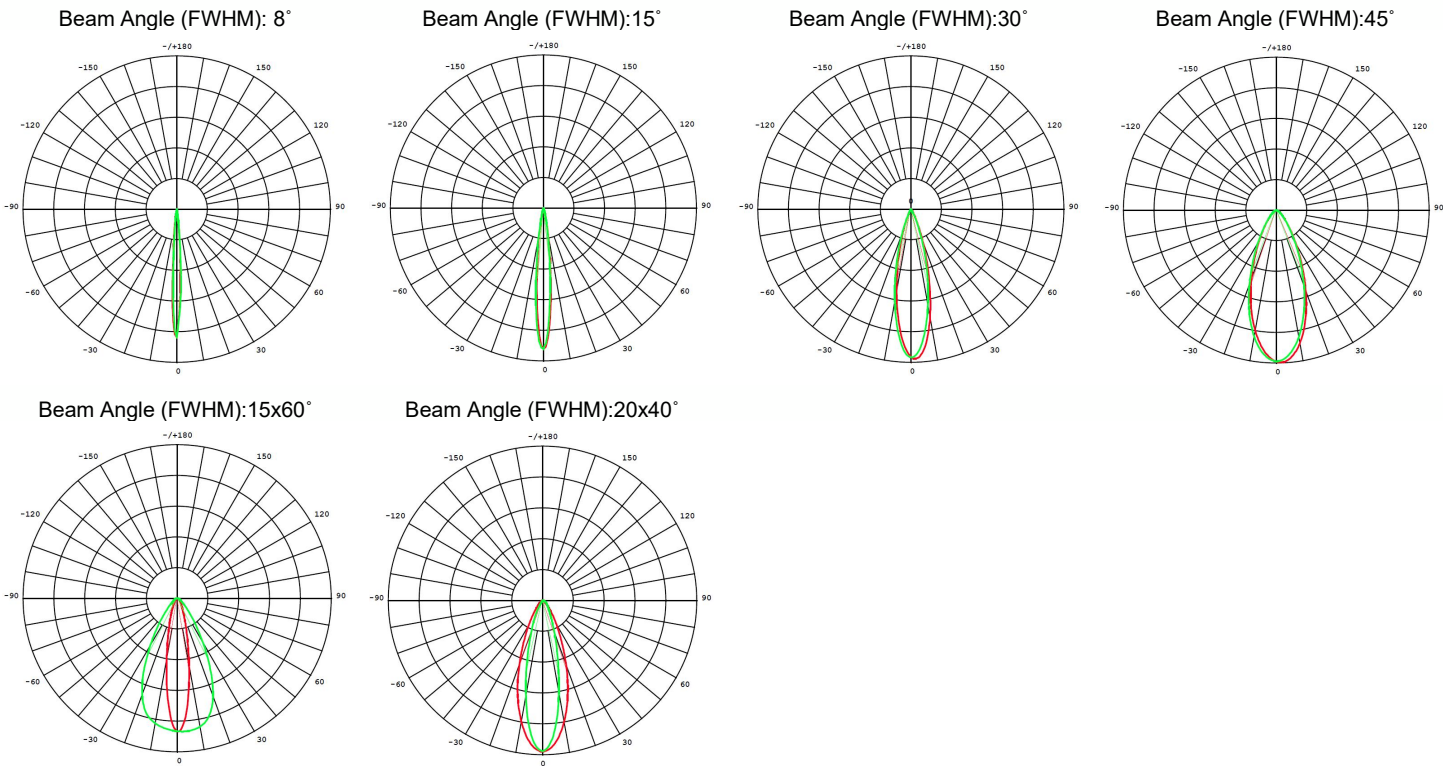

DIMENSIONS

