





GOLF-RWW33

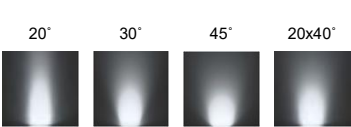

OPTIC OPTIONS



ACCESSORIES



Grille Louvre (Y1)

SPECIFICATIONS AVAILABLE FOR RWW33


Sample Part Number: RWW33-18W-18K-K27-D24-20D-CL-Y1-a-Y

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RWW33	18W	18K	K27	D24	20D	CL	Y1	a	Y
L1000	18W	18K LEDs x 18	K27 2700K	D24 24VDC	20D 20°	CL On-Off	Y1 Longitudinal Louvre	a T-Bracket	Y Anti-fallen Chain RAL# Custom RAL#
	24W	24K LEDs x 24	K30 3000K		30D 30°				
			K40 4000K		45D 45°				
L500	9W	9K LEDs x 9	K50 5000K		20X40D 20X40°				
	12W	12K LEDs x 12	K57 5700K						
L300	6W	6K LEDs x 6	K65 6500K						


SPECIFICATION

ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max.18W ±10% Max.24W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K Ra.≥70, (SDCM ≤ 7)	
	Beam Angle (FWHM)	20° 30° 45° 20X40° (LEDs x 18 LEDs x 24)	
	Efficiency (lm/W)	Mono: 100 (±10%)	
CONTROL	Operating Modes	On-Off	
PHYSICAL	Width x Height x Depth Weight	1000mm (L) x 33mm (W) x 57.8mm (H) 1.2kg	
	Housing	Body: Extrusion Aluminum AL6063	Bracket: Stainless Steel SUS304
		Cover: Tempered Glass	End-Cap: Die-casting ADC12
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	
		2 Core Cable with Male/Female Connector (2x1mm² Cable Power IN/OUT)	
	Mounting Method	T-Bracket	
	Adjustable	Yes	
	Protection Factor	DC Class III	
	IP IK Rating	IP66 IK06	
	Operating Ambient Temperature	-40°C ~ +55°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Anti-glare parts (Code)	
	Longitudinal Louvre	Y1	

PHOTOMETRIC DATA

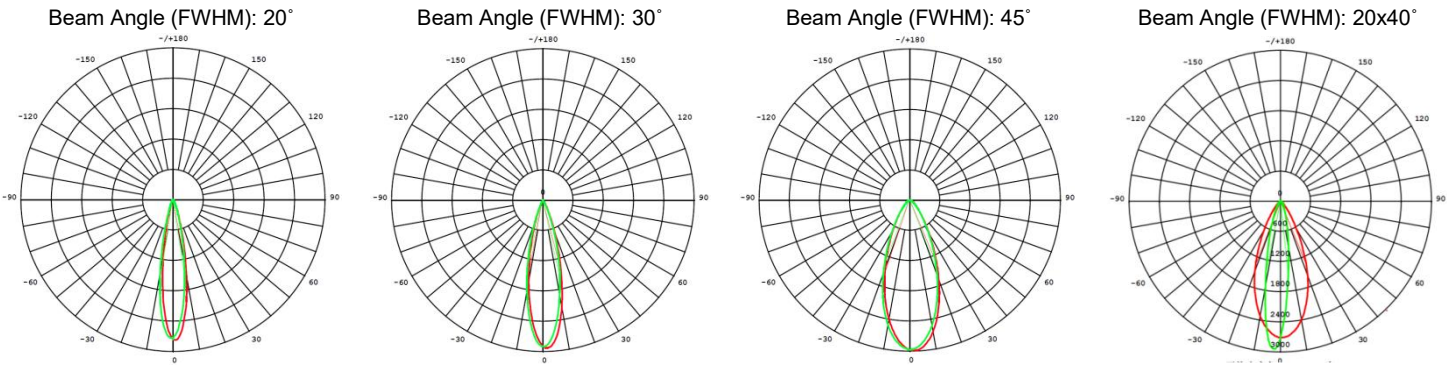

DIMENSIONS

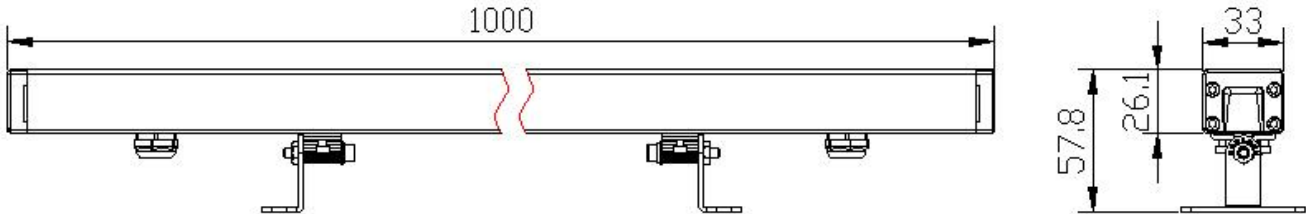

1000mm (L) x 33mm (W) x 57.8mm (H) (*L=1000 / 500 / 300mm)