



GOLF-RWW38



OPTIC OPTIONS

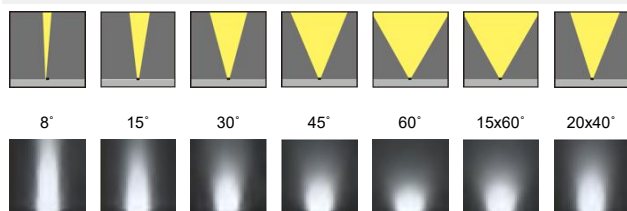

ACCESSORIES

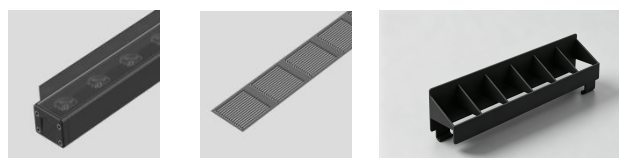

Light baffle (Y)

Grille Louvre (Y1)

Grille Louvre (Y1/O)

Outside only, 250mm section with 6 LEDs

SPECIFICATIONS AVAILABLE FOR RWW38


Sample Part Number: **RWW38-24W-24K-K27-D24-8D-CL-Y-a-Y**

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RWW38	24W	24K	K27	D24	8D	CL	Y	a	Y
L1000	24W/ 48W	24K LEDs x 24	K27 2700K	D24 24VDC	8D 8°	CL On-Off DMX DMX512	Y Light Baffle Y1 Longitudinal Louvre	a T-Bracket	Y Anti-fallen Chain RAL# Custom RAL#
L500	12W/ 24W	12K LEDs x 12	K30 3000K		15D 15°				
L300	6W/ 12W	6K LEDs x 6	K40 4000K		30D 30°				
L1000	36W	36K LEDs x 36	K50 5000K		45D 45°	CL On-Off			
L500	18W	18K LEDs x 18	K57 5700K		60D 60°				
L300	9W	9K LEDs x 9	K65 6500K		15x60D 15x60° 20x40D 20x40°				
L1000	36W	16K LEDs x 16	RGBH RGB 3in1		15D 15°	DMX DMX512			
L500	24W	12K LEDs x 12			30D 30°				
L300	12W	6K LEDs x 12			45D 45° 15x60D 15x60°				
L1000	48W	16 LEDs x 16 24K LEDs x 24	RGBWH RGB 3in1		20x40D 20x40°				
L500	24W	12K LEDs x 12							
L300	12	6K LEDs x 12							


SPECIFICATION

ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max.24W ±10% 36W±10% 48W ±10% （@L1000）	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K Ra.≥70 (SDCM ≤ 7)	
		Color: RGB(3in1) RGBW(4in1)	
	Beam Angle (FWHM)	8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x 24 LEDs x 36)	
	Efficiency (lm/W)	Mono: 68; Color: RGB(3in1): 25; RGBW(4in1): 38 (±10%)	
CONTROL	Operating Modes	On-Off; DMX	
	Control System	DMX512 Controllers	
	Settings / Addressing	DMX Communicator	
PHYSICAL	Width x Height x Depth Weight		1000mm (L) x 38mm (W) x 57.2mm (H) 1.5kg
	Housing	Body: Extrusion Aluminum AL6063	Bracket: Stainless Steel SUS304
		Cover: Tempered Glass	End-Cap: Die-casting ADC12
	Optical Material	PC	Mono: 8°
			RGB 3in1: 15/30/45/60/20*40/15*60°
		PMMA	RGBW 4in 1: 15/30/45/60/20*40/15*60°
			Mono:15/30/45/60/20*40/15*60°
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DMX
		2 Core Cable with Male/Female Connector (2x1mm ² Cable Power IN/OUT)	5 Core Cable with Male/Female Connector (2x1mm ² Power + 3x0.3 mm ² Signal IN/OUT)
	Mounting Method	T-Bracket	
	Adjustable	Yes	
	Protection Factor	DC Class III	
	IP IK Rating	IP66 IK06	
	Operating Ambient Temperature	-40°C ~ +55°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Anti-glare parts (Code)	
	Light Baffle	Y	
	Grille Lourve	Y1	
	Grille Lourve	Y1/O	

PHOTOMETRIC DATA

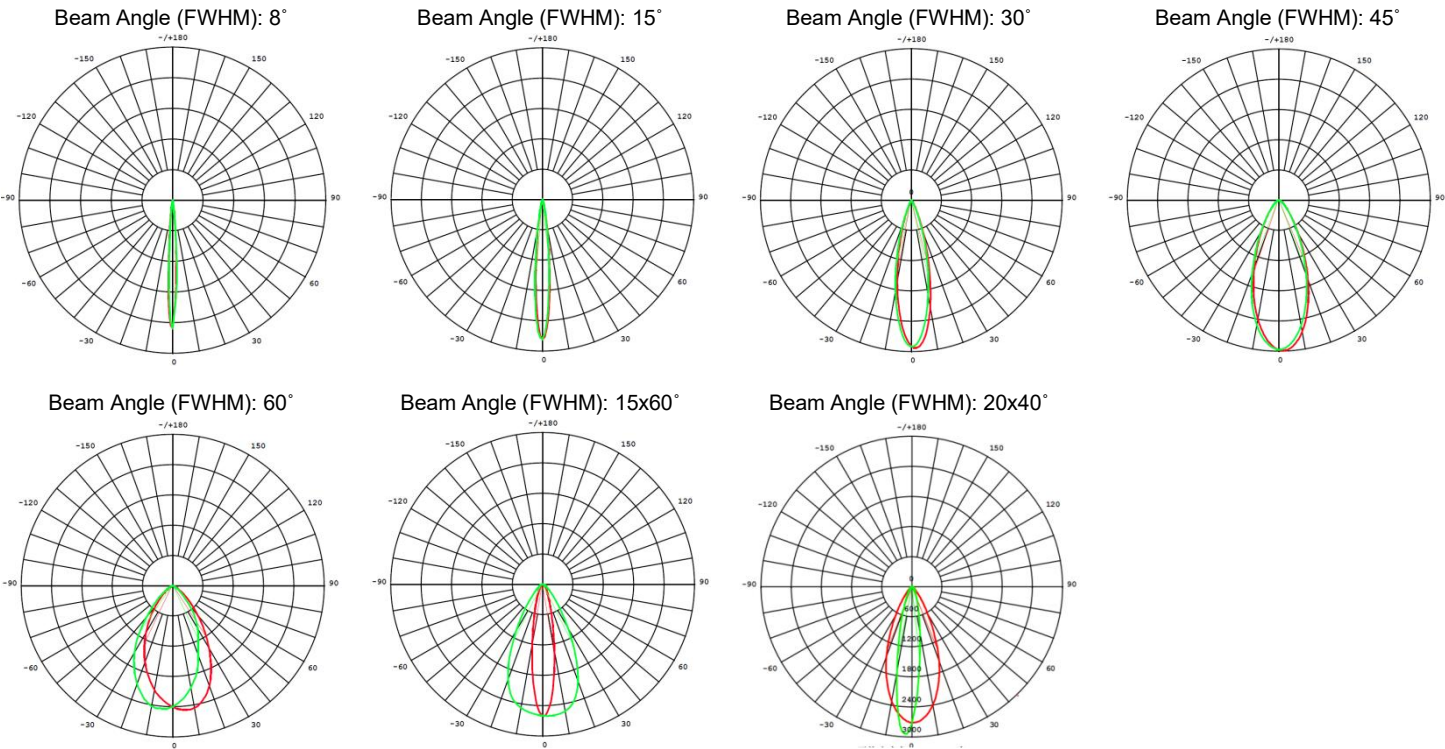

DIMENSIONS

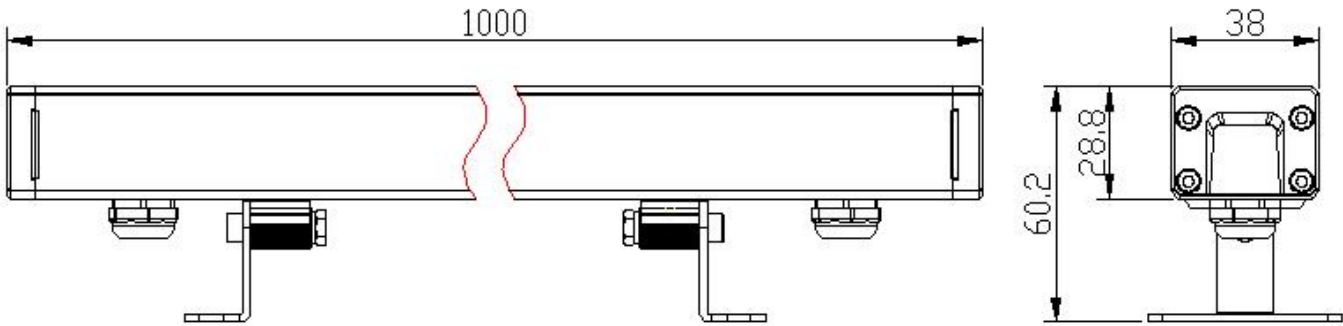

1000mm (L) x 38mm (W) x 60.2mm (H) (*L=1000 / 500 / 300mm)