




GOLF-RWW65



OPTIC OPTIONS

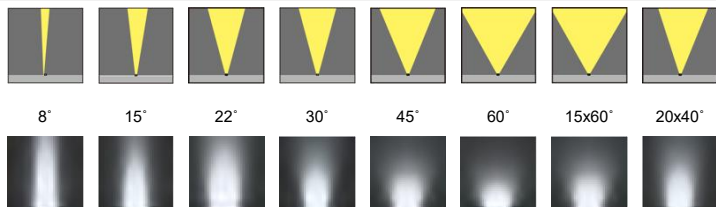

ACCESSORIES



Grille Louvre (Y1)



Light Baffle (Y)

SPECIFICATIONS AVAILABLE FOR RWW65

Sample Part Number: **RWW65-72W-36K-K27-A-8D-CL-N-N-HS**


FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RWW65	72W	36K	K27	A	8D	CL	N	N	HS
L1000	72W	36K LEDs x36	K27 2700K	A 220VAC~50/60HZ D24 24VDC	8D 8° (only mono)	CL On-Off DMX DMX512	N None	N None	HS RAL9001
L500	36W	18K LEDs x18	K30 3000K		15D 15°		Y Light Baffle		RAL# Custom RAL#
L300	24W	12K LEDs x12	K40 4000K		30D 30°		Y1 Grille Louvre		
L1000	60W	30K LEDs x30 36K LEDs x36 24K LEDs x24 (only 4in1)	K50 5000K K57 5700K K65 6500K		45D 45° 60D 60°				
L500	30W	15K LEDs x15 18K LEDs x18 12K LEDs x12 (only 4in1)	RGBWH RGBW 4in1		15x60D 15x60° 20x40D 20x40°				
L300	20W	10K LEDs x10 12K LEDs x12 6K LEDs x6 (only 4in1)							
L1000	60W	126K LEDs x126	RGPLLCB 7in1: Red, Green, Blue, PC Amber, Lime, Cyan, Lime						
L500	30W	63K LEDsx63							
L300	20W	42K LEDsx42							

SPECIFICATION


ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver) 220VAC(Build-in LED driver)	
	Typical Power Consumption	Max.48W ±10% Max.60W ±10% Max.72W ±10% (@L1000)	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K Ra.≥80 (R9 ≥0, SDCM ≤ 5) 5000K 5700K Ra.≥70 (R9≥0, SDCM ≤ 5)	
		Color: RGBW 4in1 5in1 7in1	
	Beam Angle (FWHM)	Mono: 8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x30, LEDs x36)	
		RGBW 4in1: 15° 30° 45° 60° 15x60° 20x40° (LEDs x24, LEDs x36)	
		5in1: 15° 22° 45° (LEDs x90)	
		7in1: 15° 22° 45° (LEDs x126)	
Efficacy (lm/W)	Mono: 56~75; Color: 38~63 (±10%)		
CONTROL	Operating Modes	On-Off; DMX	
	Control System	DMX512 Controllers	
	Settings / Addressing	DMX Communicator	
PHYSICAL	Width x Height x Depth Weight	1000mm (L) x65mm (W) x110mm(H) 3.5kg	
	Housing	Body: Extrusion Aluminum AL6063	Bracket: Stainless Steel SUS304
		Cover: Tempered Glass	End-Cap: Die-casting ADC12
	Optical Material	PC	Mono: 8°
			RGB 3in1/RGBW 4in1: 15/30/45/60/20*40/15*60°
		PMMA	5in1/ 7in1: 15/22/45°
			15/30/45/60/20*40/15*60°
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DMX
		DC: 2 Core Cable with Male/Female Connector (2x1.0 mm² Cable Power IN/OUT)	DC: 5 Core Cable with Male/Female Connector (2x1.0 mm² Power + 3x0.3 mm² Signal IN/OUT)
		AC: 3 Core Wire Lead Cable (3x1.0 mm² Cable Power IN)	AC: Wire Lead Cable (3x1.0 mm² Power IN)
			4 Core Cable Male/Female Connector (4x0.3 mm² Signal IN/OUT)
	Mounting Method	T-Bracket	
	Adjustable	Yes	
	Protection Factor	Class III @24VDC; Class I @220VAC	
	IP IK Rating	IP66 IK06	
	Operating Ambient Temperature	-40°C ~ +55°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Anti-glare parts (Code)	
	Light Baffle	Y	
	Grille Louvre	Y1	

PHOTOMETRIC DATA


Beam Angle (FWHM): 8°




Beam Angle (FWHM): 15°




Beam Angle (FWHM): 22°




Beam Angle (FWHM): 30°




Beam Angle (FWHM): 45°




Beam Angle (FWHM): 60°




Beam Angle (FWHM): 15x60°



Beam Angle (FWHM): 20x40°



DIMENSIONS

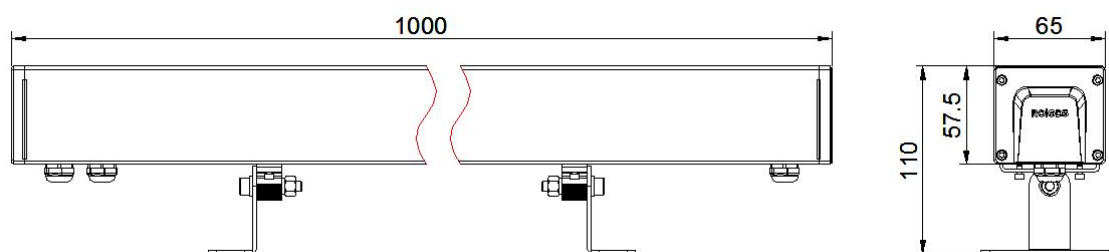

1000mm (L) x 65mm (W) x 110mm (H) (*L=1000 / 500 / 300mm)