

RLP101



OPTIC OPTIONS



T4S(left)

T4S(right)



SPECIFICATIONS AVAILABLE FOR RLP101


Sample Part Number: RLP101-9W-8K-K27-D24-T4S1L-N-N-N-RAL#

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RLP101	9W	8K	K27	D24	T4S1L	N	N	N	RAL#
			K27 2700K	D24 24VDC	T4S1L, T4 Single Lane (Left side)	N On-Off	N None	N None	RAL# Custom RAL#
			K30 3000K		T4SLR, T4 Single Lane (Right Side)				
			K40 4000K		T4S2L, T4 Double Lane (Left side)				
			K50 5000K		T4S2R, T4 Double Lane (Right side)				
	9W	8K LEDs x8	K57 5700K						
	13.5W	12K LEDs x12							

SPECIFICATION

ELECTRICAL	Input Voltage	24VDC	
	Typical Power Consumption	Max.9W ±10% 13.5W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	2700K 3000K 4000K 5000K 5700K Ra.>70	
	Beam Angle (FWHM)	T4S1L T4S1R T4S2L T4S2R	
	Efficacy (lm/W)	70 ±10%	
CONTROL	Power Supply	Integrated	
	Operating Modes	On-Off	
PHYSICAL	Width x Height x Depth Weight	290mm(L) x 155mm (W) x 93mm (H) 1.5kg	
	Housing	Body: Die-Casting Aluminum ADC12	
		Cover: Tempered Glass	
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	
		Cable 2 Wire Lead	
	Mounting Method	Recessed	
	Adjustable	No	
	Protection Factor	Class III	
	IP IK Rating	IP66 IK07	
	Operating Ambient Temperature	-40°C ~ +50°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Optional Items	None	

PHOTOMETRIC DATA

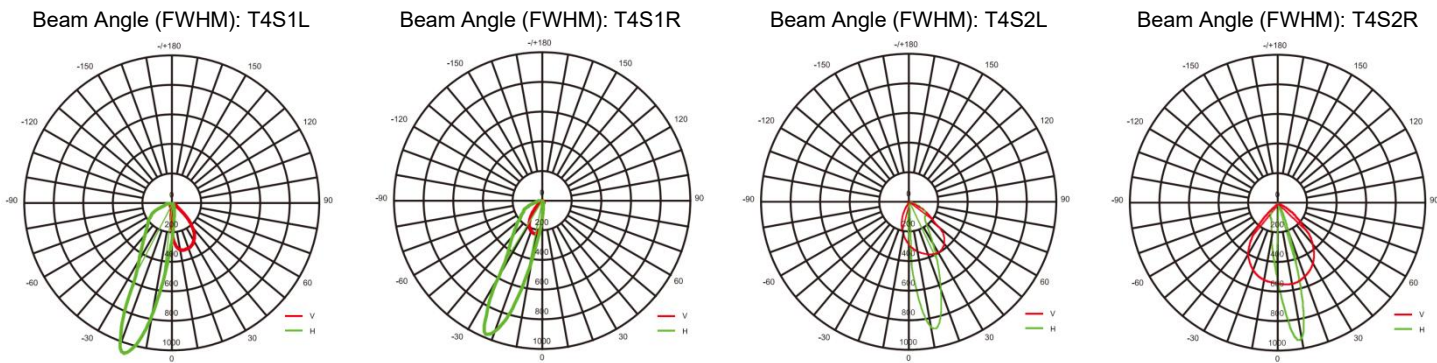

DIMENSIONS

