

GOLF-RDO5623



DMX
512

-25~+50°C

2700-6500K

IP67

DC
24V

IK10

OPTIC OPTIONS



95°

SPECIFICATIONS AVAILABLE FOR RDO5623

Sample Part Number: RDO5623-1.4W-4K-K27-D24-95D-CL-T5-N-N


FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	COVER	OPTIONS/ BRACKET*	OPTIONS/ CUSTOMIZATION*
RDO5623	1.4W	4K	K27	D24	95D	CL	T5	N	N
RDO5623	1.4W	4K LEDs x 4	K27 2700K K30 3000K K40 4000K K50 5000K K57 5700K K65 6500K RGBH RGB(3in1)	D24 24VDC	95D 95°	CL On-Off DMX DMX512	T5 Transparent Cover	N None	N None
	1.8W		RGBWH RGBW(4in1)						

SPECIFICATION


ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max.1.4W ±10% 1.8W±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K 6500K Ra.>80, (SDCM < 7)	
		Color: RGB(3in1) RGBW(4in1)	
	Beam Angle (FWHM)	95° (LEDs x 4)	
	Efficiency (lm/W)	Mono: 70 (±10%); RGB(3in1): 15(±10%); RGBW(4in1): 30 (±10%)	
CONTROL	Power Supply	Integrated	
	Operating Modes	On-Off; DMX	
	Control System	DMX512 Controllers	
	Settings / Addressing	DMX Communicator	
PHYSICAL	Length x Width x Height Weight	56mm x 35mm x15mm 18g	
	Housing	Body: PC	
		Cover: PC	
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DMX
		2 Core Wire with Male/Female Connector (2x0.75mm² RVV Wire Power IN/OUT)	5 Core Wire with Male/Female Connector (2x1mm² Power + 3x0.3 mm² Signal IN/OUT)
		Mounting Method	Aluminum Profile
		Adjustable	No
		Protection Factor	Class III
		IP IK Rating	IP67 IK10
		Operating Ambient Temperature	-25°C ~ +50°C
CERTIFICATION	Listings	CE, RoHS	

PHOTOMETRIC DATA

Beam Angle (FWHM): 95°



DIMENSIONS

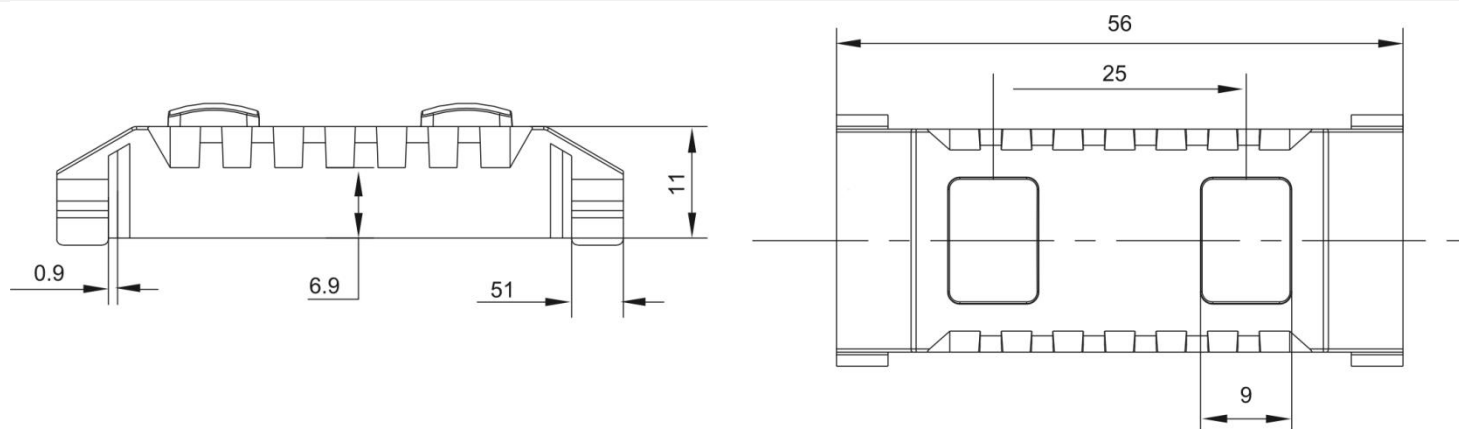

APPLICATION

