


Picchio-RFL35R



OPTIC OPTIONS

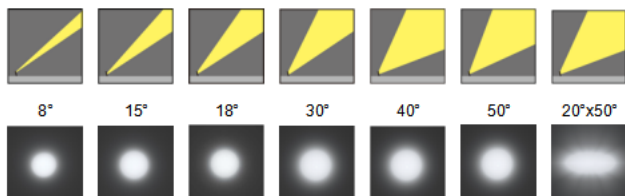

ACCESSORIES



SPECIFICATIONS AVAILABLE FOR RFL35R

Sample Part Number: RFL35R-6W-1K-K27-D24-8D-CL-N-B4-QNBS

FIXTURE TYPE	WATTAGE	LED #	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RFL35R	6W	1K	K27	D24	8D	CL	N	B4	QNBS
RFL35R	6W	1K LEDs x1 (Luminus 3535)	K27 2700K K30 3000K K40 4000K	D24 24VDC	8D 8° 15D 15°	CL On-Off D010 0-10V DMX DMX512 DALI DALI	N None Y2 Honeycomb Y8 Deepcomb Y9 Bullseye Y Cylindrical Screen	B4 Pedestal Mount BD Band Bracket SPM5/160 Spike M5 Screw	QNBS Silver Grey RAL# Custom RAL#
		1K LEDs x1 (5050)	K50 5000K K57 5700K		18D 18° 30D 30° 40D 40° 50D 50° 20x50D 20°x50°				

SPECIFICATION SHEET


FLOOD LIGHT




SPECIFICATION

ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max.6W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	2700K 3000K 4000K 5000K 5700K, Ra.≥80 (SDCM ≤ 5)	
	Beam Angle (FWHM)	8° 15° (LEDs x1, Luminus 3535); 18° 30° 40° 50° 20°x50° (LEDs x1, 5050)	
	Efficacy (lm/W)	60±10% (8°/15°), 80±10% (18°/30°), 60±10% (40°/ 50°/20°x50°)	
CONTROL	Operating Modes	On-Off, DMX, 0-10V (External), DALI (External)	
	Control System	0-10V Controller, DMX512 Controllers, DALI Controller	
	Settings / Addressing	DMX/RDM Communicator, DALI Addressing	
PHYSICAL	Length x Width x Height Weight	74.5mm x 41.8mm x 85.4mm 0.2kg	
	Housing	Body: Die-Cast Aluminum ADC12	
		Cover: Tempered Glass	
	Finish Options	Standard Color	Silver Grey
		Cost Option	Custom RAL #
		ON-OFF / 0-10V / DALI	DMX
	Cables / Connections	2 Core Cable with Male/Female Connector (2x1mm ² Cable Power IN)	6 Wire Lead Cable (2X0.5 mm ² Power IN+4X0.3mm ² Signal IN/OUT)
	Mounting Method	Pedestal Mount	
	Adjustable	+90° /-45°	
	Protection Factor	Class III	
	IP IK Rating	IP66 IK08	
	Operating Ambient Temperature	-40°C ~ +50°C	
CERTIFICATION	Listings	CE	
ACCESSORIES	Not Included Items	Anti-glare parts (Code)	Brackets (Code)
	Cylindrical Screen	Y	
	Honeycomb	Y2	
	Deepcomb	Y8	
	Bullseye	Y9	
	Band Bracket		BD
	Spike M5 Screw		SPM5/160

PHOTOMETRIC DATA

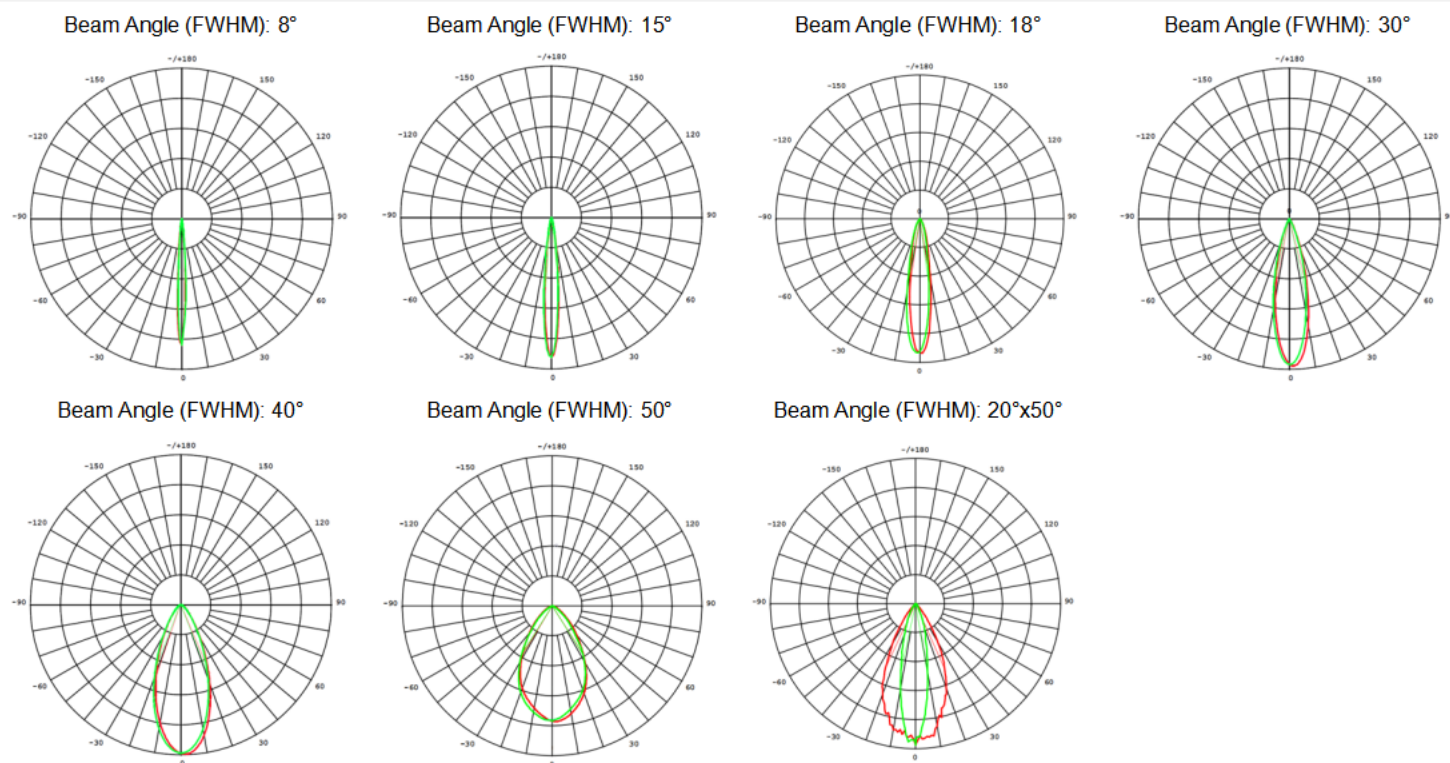

DIMENSIONS

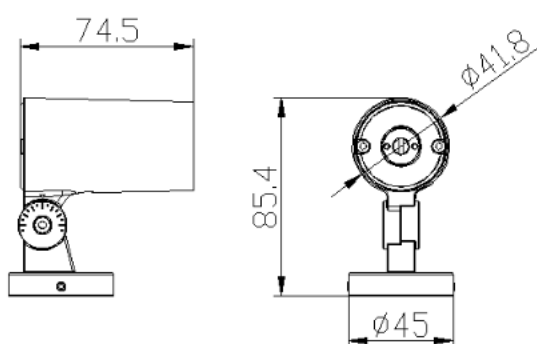

BRACKET ACCESSORIES



Spike M5 Screw (SPM5/160)



Band Bracket (BD)