


RHB10



SPECIFICATIONS AVAILABLE FOR RHB10S/ 10M/ 10L/ 10SP/ 10MP/ 10LP

Sample Part Number: RHB10S-60W-188K-K30-A-60D-CL-N-N-RAL#


FIXTURE TYPE	WATTAGE	LEDs	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION*
RHB10S	60W	188K	K30	A	60D	CL	N	N	RAL#
RHB10S	60W	188K LEDs x 128	K30 3000K	A 220VAC	60D 60°	CL On-Off	N None	N None	RAL# Custom RAL#
	80W	252K LEDs x 252	K40 4000K		90D 90°	DALI	Y Visor		
	100W	319K LEDs x 319	K57 5700K				a Lifting ring + U-shaped shackle b Suspension rod		
RHB10M	150W	474K LEDs x 474							
RHB10L	200W	639K LEDs x 639							
RHB10SP	100W	319K LEDs x 319							
RHB10MP	150W	474K LEDs x 474							
RHB10LP	200W	639K LEDs x 639							

SPECIFICATION


ELECTRICAL	Input Voltage	220VAC(Build-in LED driver)	
	Typical Power Consumption	RHB10S: Max. 60W ±10% 80W ±10% 100W ±10% RHB10SP: 100W ±10% RHB10M/ MP: Max.150W ±10% RHB10L/ LP: Max. 200W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	3000K 4000K 5700K Ra.≥80 (SDCM ≤ 5)	
	Beam Angle (FWHM)	60° 90°	
	Efficacy (lm/W)	RHB10S/ M/ L : 3000K: 138 ±10% 4000K 5700K: 150 ±10% RHB10SP/ MP/ LP : 3000K: 165 ±10% 4000K 5700K: 180 ±10%	
CONTROL	Power Supply	Integrated	
	Operating Modes	On-Off/ DALI	
PHYSICAL	Width x Height x Depth Weight	RHB10S/ SP: 261*97.5 1.24kg RHB10M/ MP:300.8*100.4 1.5kg RHB10L/ LP: 329*100.4 1.7kg	
	Housing	Body: Die-Casting Aluminum ADC12	
		Cover: Iron	
	Finish Options	Standard Color	Graphite Black RAL 9011
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DALI
		Cable 3 Wire Lead 3×1.0mm ²	
	Accessory	Visor (Y)	
		a Lifting ring + U-shaped shackle (a)	
		Suspension rod (b)	
	Mounting Method	Pendant mounting	
	Adjustable	Yes	
	Protection Factor	Class I	
	IP IK Rating	IP65 IK06	
	Operating Ambient Temperature	-20°C ~ +40°C	
CERTIFICATION	Listings	CE	

PHOTOMETRIC DATA


Beam Angle (FWHM): 60°

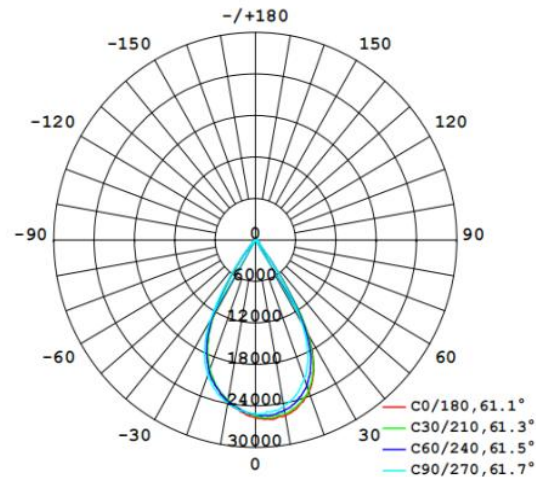


Beam Angle (FWHM): 90°

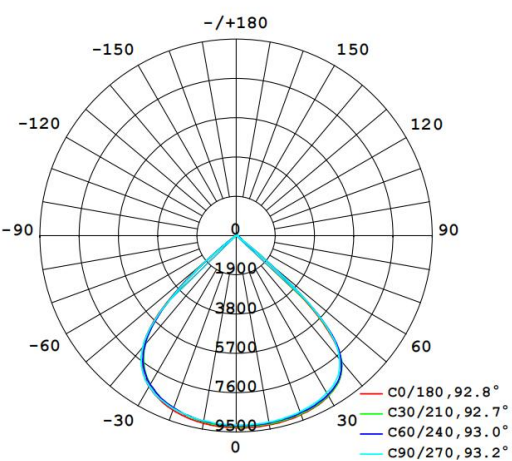


100W 90° 180Lm/W

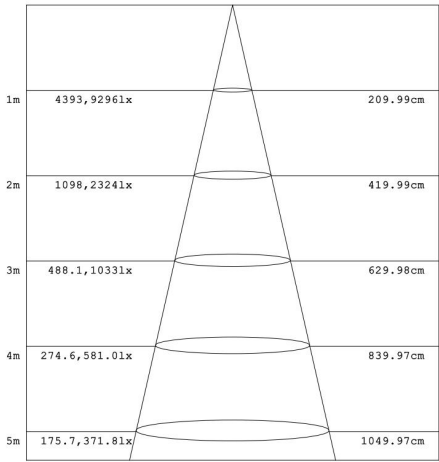

150W 90° 180Lm/W

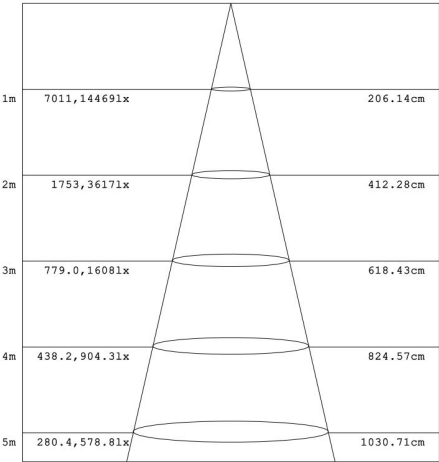

200W 90° 180Lm/W

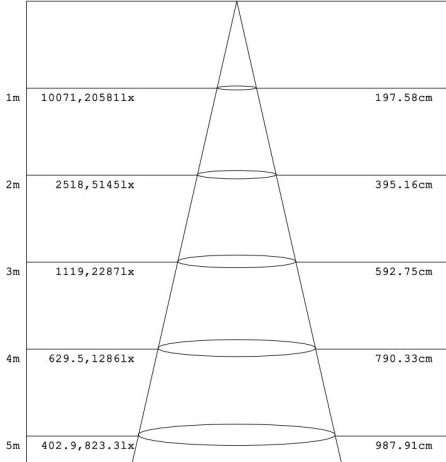

DIMENSION

RHB10S/ RHB10SP



RHB10M/ RHB10MP



RHB10L/ RHB10LP

