


RTL101C





Thank you for purchasing the ROLEDs product. Please read this manual carefully before use and keep it for future reference.

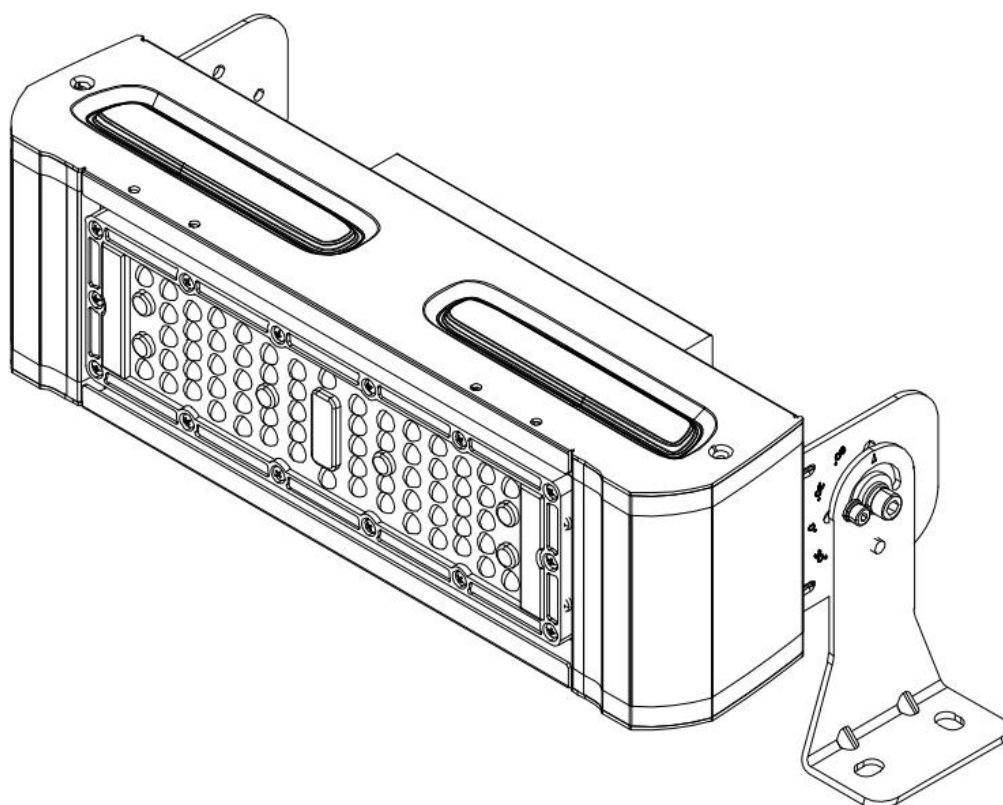


Fixture must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!

STEP 1: Luminaire Installation


This luminaire is available with multiple combination options. Please select the appropriate number of modules according to your requirements.

①

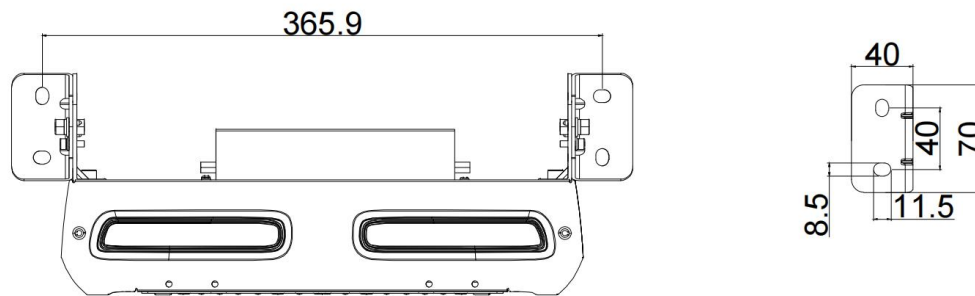


Drill holes in the surface according to the given dimensions.

②

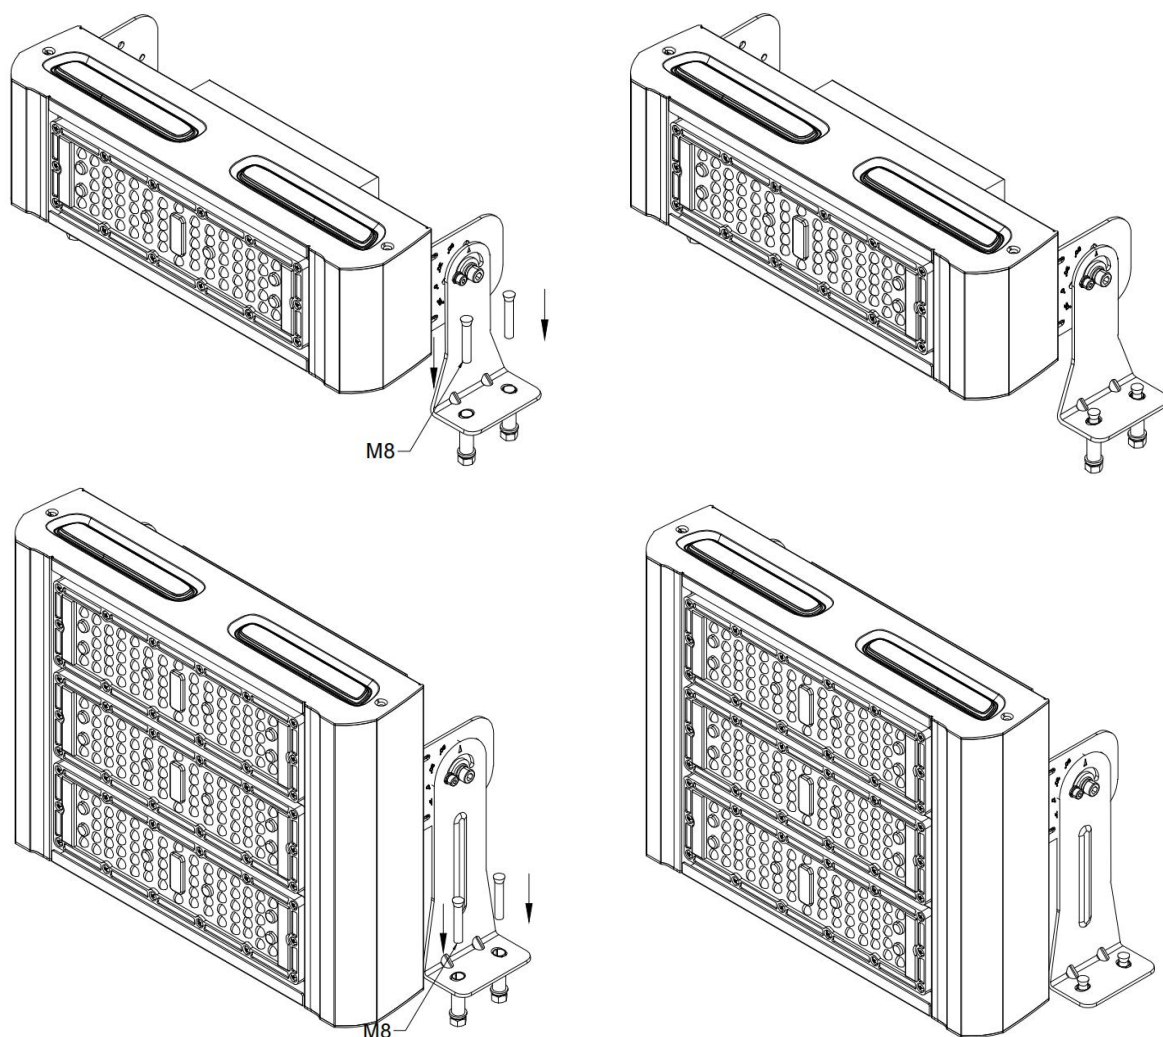

Insert the lower part of the expansion bolts into the holes, align the luminaire with the holes, place it on the surface, and install the upper part.

③


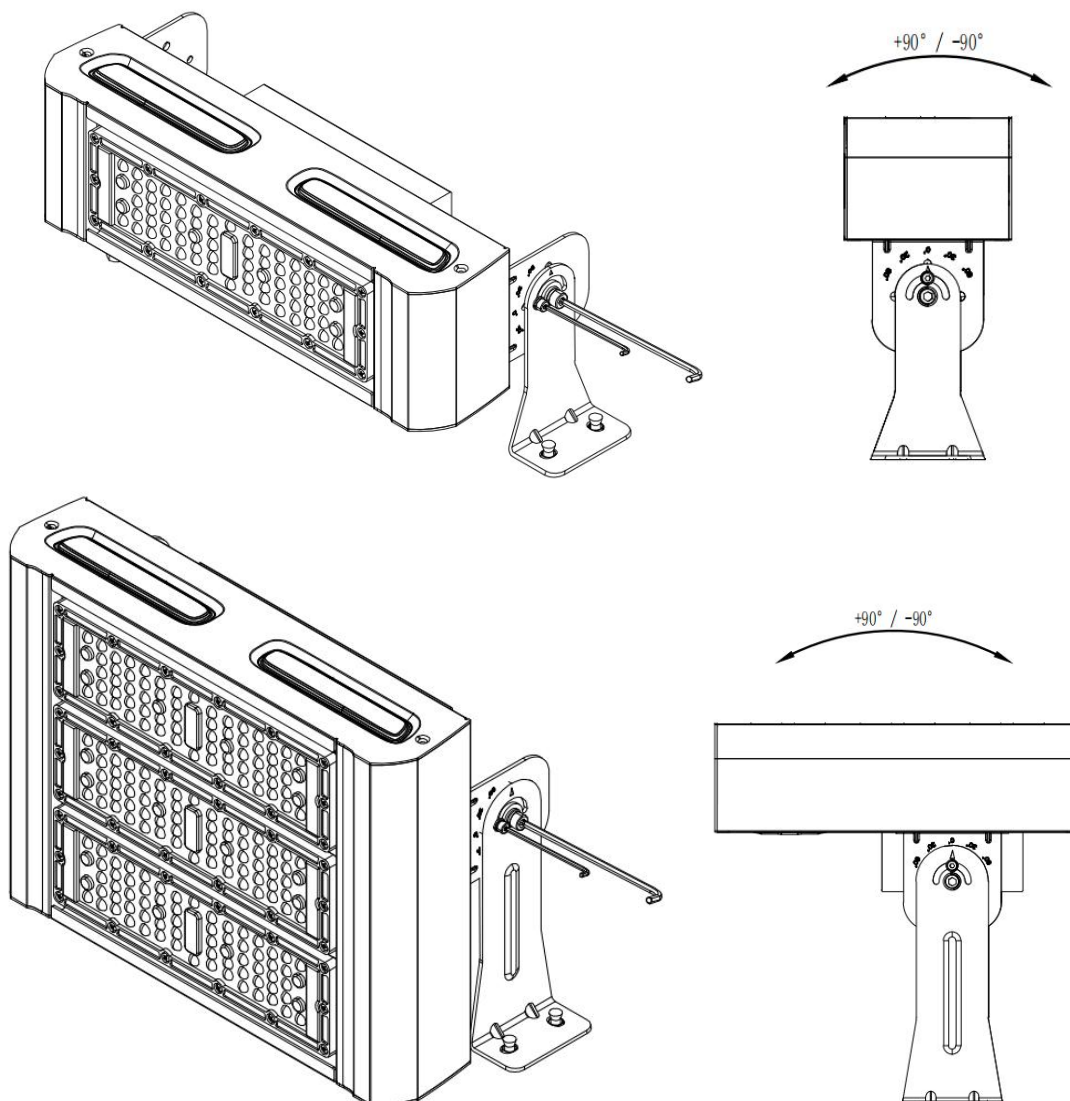


Use an Allen key to release tilting lock on each side of the luminaire, and adjust the tilt to a range of $+90^{\circ}$ / -90° . Retighten the screws after adjusting to the appropriate tilt angle.

STEP 2: Wiring Cable Installation

 The connection of the power cord needs to be well connected in a waterproof junction box, which needs to be purchased separately.

ON/OFF AC

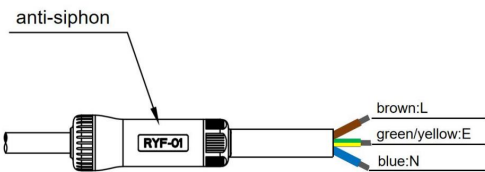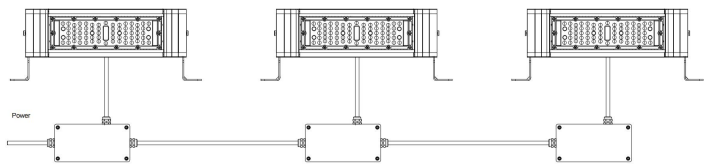

Power In: 3-core wire lead with anti-siphon

WARNING & NOTICE

- ⚠ To ensure product quality and safety, please follow the operating instructions in a safe place and under power-off conditions.
- ⚠ Wire the power supply to the electrical mains only after the connection to the products has been carried out.
- ⚠ The cable should be suitably protected against direct contact with the ground and avoid letting the product come into direct contact with the ground.
- ⚠ Before powering up the system, please ensure that the polarity is connected correctly. Incorrect connection may cause product malfunction.
- ⚠ Do not install the fixture in areas where water tends to collect.
- ⚠ Under any possible circumstances causing outer cables damaged, excessively bent, pulled or squeezed by external forces, the latter should be replaced by the manufacturer, or by the corresponding service, or by an appropriated and qualified member of staff in order to avoid all risk of danger.
- ⚠ Should the glass break, the product cannot be used.
- ⚠ Do not stare at the operating lighting source.
- ⚠ After 45mins of the sunset or before 45mins of the sunrise are allowed daily operation period for product temperatures $>25^{\circ}\text{C}$.
- ⚠ Fixtures not suitable to be covered in thermally-insulating material.
- ⚠ Secondary protection is required for bare wire connections: For a single core, first wrap it with waterproof tape and then insulate it with electrical tape; then wrap the entire core assembly with waterproof tape again, followed by insulation with electrical tape (Note: This method is not recommended as it does not comply with specifications).
- ⚠ The luminaire must be reliably grounded.

