

GOLF-RLL24P




OPTIC OPTIONS




120°



BRACKET TYPES



Clip Bracket (a)



Screw-in Bracket (b)

SPECIFICATIONS AVAILABLE FOR RLL24P

Sample Part Number: **RLL24P-15W-48K-K27-D24-120D-CL-N-a-Y**


FIXTURE TYPE	WATTAGE	LEDs	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/ CUSTOMIZATION *
RLL24P	15W	48K	K27	D24	120D	CL	N	a	Y
	15W	48K LEDs x 48	K27 2700K K30 3000K K40 4000K K50 5000K K57 5700K RGBH RGB(3in1) RGBWH RGBW(4in1)	D24 24VDC D48 48VDC	120D 120°	CL On-Off DMX DMX512	N N/A	a Clip Bracket b Screw-in Bracket	Y Anti-fallen Chain RAL# Custom RAL#

SPECIFICATION


ELECTRICAL	Input Voltage	24VDC 48VDC (External PSU, build-in LED driver)	
	Typical Power Consumption	Max.15W ±10%	
OPTICAL	Light Source	High Power LED	
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K (SDCM ≤ 5)	
		Color: RGB(3in1) RGBW (4in1)	
	Beam Angle (FWHM)	120° (LEDs x 48)	
	Efficiency (lm/W)	Mono: 29 RGB(3in1):17 RGBW(4in1): 20 (±10%)	
CONTROL	Operating Modes	On-Off; DMX	
	Control System	DMX512 Controllers	
	Settings / Addressing	DMX Communicator	
PHYSICAL	Width x Height x Depth Weight	1000mm(L) x24mm (W) x41.6mm (H) 0.6kg	
	Housing	Body: Extrusion Aluminum AL6063	Bracket: SUS304(a) AL6063(b)
		Cover: PC	End Cap: PC
	Finish Options	Standard Color	Extrusion Aluminum
		Cost Option	Custom RAL #
	Cables / Connections	ON/OFF	DMX
		2 Core Cable with Male/Female Connector (2x1mm ² Cable Power IN/OUT)	5 Core Cable with Male/Female Connector (2x1mm ² Power + 3x0.3 mm ² Signal IN/OUT)
	Mounting Method	Clip Bracket (a); Screw-in Bracket (b)	
	Adjustable	±90°	
	Protection Factor	DC Class III	
	IP IK Rating	IP66 IK07	
	Operating Ambient Temperature	-40°C ~ +55°C	
CERTIFICATION	Listings	CE, RoHS	
ACCESSORIES	Not Included Items	Cover (Code)	Bracket Parts (Code)
	Square Milky Cover	P1a	
	Clip Bracket (SUS304)		a
	Screw-in Bracket (AL6063)		b

PHOTOMETRIC DATA


Beam Angle (FWHM): 120°




DIMENSIONS

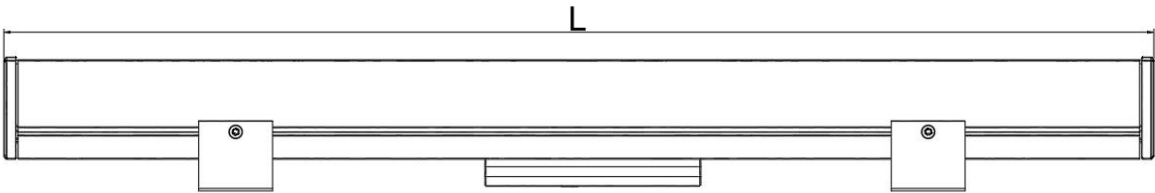

L=1000 / 500 / 300mm



Clip Bracket
(a)



Screw-in Bracket
(b)

ACCESSORIES

