





SPECIFICATION SHEET
INGROUND LIGHT



GOLF - RGLL50

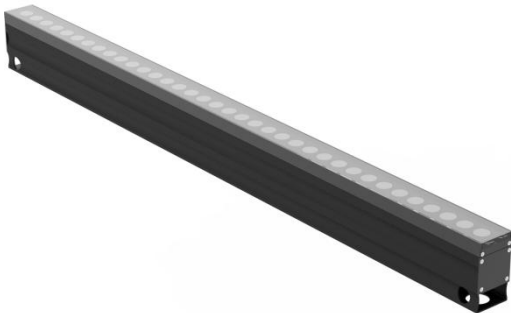

OPTIC OPTIONS ACCESSORIES

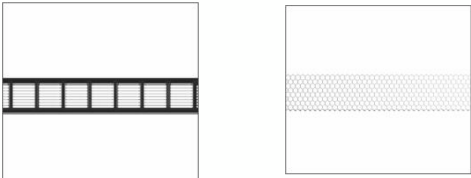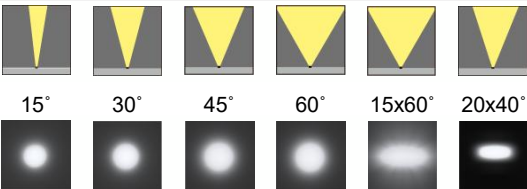

Longitudinal Louvre (Y1) Honeycomb Louvre (Y2)

SPECIFICATIONS AVAILABLE FOR RGLL50

Sample Part Number: RGLL50-36W-36K-K27-D24-15D-CL-Y1-N-RAL#

FIXTURE TYPE	WATTAGE	LEDS	CCT.	INPUT VOLTAGE	BEAM ANGLE	CONTROL	ANTI-GLARE ACCESSORIES	BRACKET	OPTIONS/CUSTOMIZATION*
RGLL50	36W	36K	K27	D24	15D	CL	Y1	N	RAL#
L1000	36W	36K LEDs x36	K27 2700K	D24 24VDC	15D 15°	CL On-Off DMX DMX512	Y1 Longitudinal Louvre Y2 Honeycomb Louvre	N N/A	RAL# Custom RAL#
L500	18W	18K LEDs x18	K30 3000K		30D 30°				
L300	9W	9K LEDs x9	K40 4000K		45D 45°				
			K50 5000K		60D 60°				
			K57 5700K		15x60D 15x60°				
			K65 6500K		20x40D 20x40°				
L1000	36W	18K LEDs x18	RGBWH RGBW(4in1)	D24 24VDC	15D 15°	CL On-Off DMX DMX512	Y1 Longitudinal Louvre Y2 Honeycomb Louvre	N N/A	RAL# Custom RAL#
L500	36W	9K LEDs x18			30D 30°				
					45D 45°				
					15x60D 15x60°				
					20x40D 20x40°				
L1000	48W	24K LEDs x24	RGBWH RGBW(4in1)	D24 24VDC	CL On-Off DMX DMX512	Y1 Longitudinal Louvre Y2 Honeycomb Louvre	N N/A	RAL# Custom RAL#	
L500	24W	12K LEDs x24							
L300	12W	6K LEDs x24							


SPECIFICATION		
ELECTRICAL	Input Voltage	24VDC (External PSU, build-in LED driver)
	Typical Power Consumption	Max.36W ±10% 48W ±10%
OPTICAL	Light Source	High Power LED
	Color Variants	Mono: 2700K 3000K 4000K 5000K 5700K 6500K Ra.≥80 (R9≥0) (SDCM≤7)
		Color: RGBW(4in1)
	Beam Angle (FWHM)	Mono: 8° 15° 30° 45° 60° 15x60° 20x40° (LEDs x36)
		Color: RGBW(4in1) - 15° 30° 45° 15x60° 20x40° (LEDs x18, LEDs x24)
	Efficiency (lm/W)	Mono: 51; Color: 21 (±10%)
CONTROL	Operating Modes	On-Off; DMX
	Control System	DMX512 Controllers
	Settings / Addressing	DMX Communicator
PHYSICAL	Width x Height x Depth Weight	1000mm(L) x 50mm(W) x 90mm (H) 3.65kg
	Housing	Body: Extrusion Aluminum AL6063
		Cover: Tempered Glass
	Optical Material	PC
		Mono: 8° RGBW(4in1): 15/30/45/60/20*40/15*60°
		PMMA
		Mono: 15/30/45/60/20*40/15*60°
	Finish Options	Standard Color
		Graphite Black RAL 9011
		Cost Option
		Custom RAL #
	Cables / Connections	ON / OFF
		DMX
ACCESSORIES	Listings	CE, RoHS
	Not Included Items	Anti-glare Parts (Code)
	Longitudinal Louvre	Y1
	Honeycomb Louvre	Y2

SPECIFICATION SHEET

INGROUND LIGHT



PHOTOMETRIC DATA

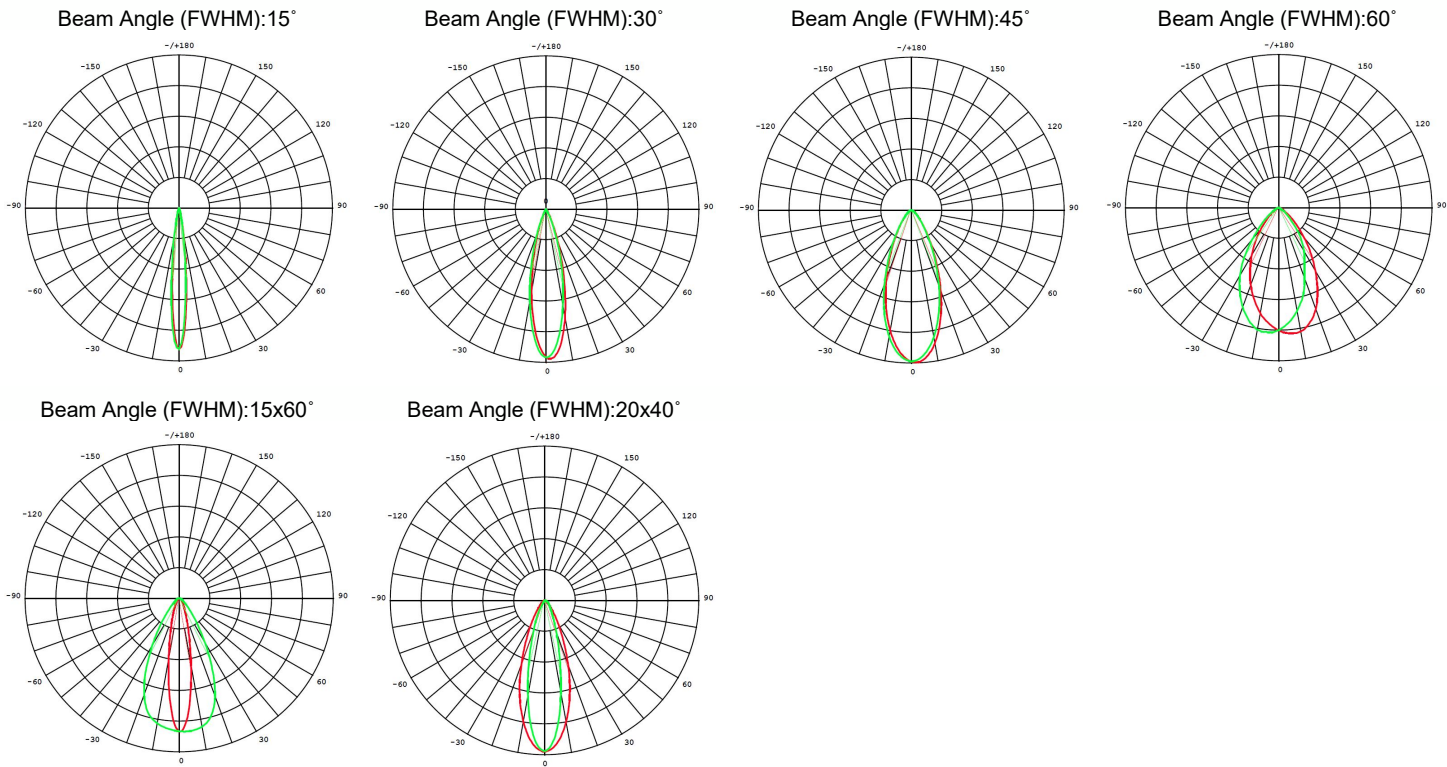

DIMENSIONS

